



REINFORCEMENT DETAILS FOR 220 MM S.S.C.P.

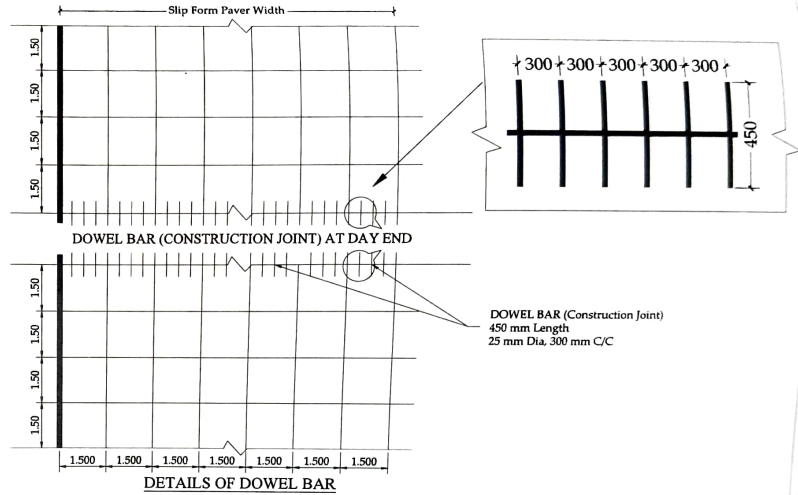

Note -

1. MS dowel bars (25mm dia, 450mm long, spacing 300 c/c) shall be provided only at transverse construction joints At day End
2. These contraction joints shall be sealed with polysulphide /silicon sealant after making a sealing proof as proposed in codal provisions.
3. Other saw cut contraction joints with initial saw cut width of 3-5mm shall be sealed with compression seals made of synthetic rubber applied into the joints using a lubricating adhesive or sealed with polysulphide sealant without making any sealing groove, i.e. without widening the initial saw cut width

NAME OF WORK :- CONSTRUCTION OF RIGID PAVEMENT ROW-18 m OF SURAT

SUBMITTED TO : Road Development Dept. SURAT MUNICIPAL CORPORATION



DESIGN CONSULTANT

MATTTEST ENGINEERING SERVICES LLP