


60mm THICK
PAVER BLOCKS

40mm THICK
SEND BED

THICK BASE
LAYER OF GSB

COMPACTED
YELLOW SOIL

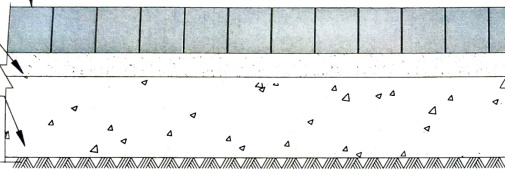


TYPICAL CROSS SECTION OF 60 mm
BLOCK PAVEMENT USE IN FOOTPATH

100mm THICK
PAVER BLOCKS


40mm THICK
SEND BED

THICK BASE
LAYER OF GSB

COMPACTED
YELLOW SOIL

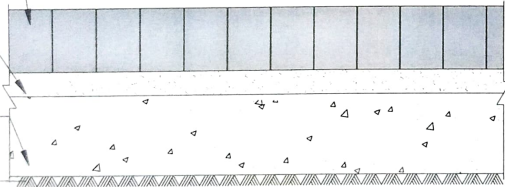

TYPICAL CROSS SECTION OF 100 mm BLOCK

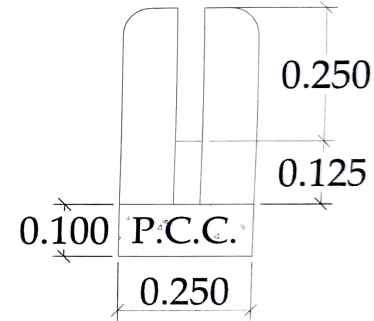

DIMENSIONS OF KERB STONE IN METERS

PAVER BLOCK, FOOTPATH AND MEDIAN DETAILS

NAME OF WORK :- CONSTRUCTION OF RIGID PAVEMENT ROW-18 m
OF SURAT

SUBMITTED TO : Road Development Dept.
SURAT MUNICIPAL CORPORATION



DESIGN CONSULTANT
MATTEST ENGINEERING SERVICES LLP



[Handwritten Signature]