



पुणे महानगरपालिका, पुणे

PMC/ZONE-4/HADAPSAR/EX-2
2026

Tender Abstract

Work Name : हडपसर-मांजरी क्षेत्रीय कार्यालयाचे कार्यक्षेत्रातील रस्त्यांवरील चेंबर्स समपातळीत करणे, RCC चेंबर्स करणे, क्षेत्रीय कार्यालय निहाय मोबाईल मॅटेनन्स युनिटद्वारे देखभाल दुरुस्तीची कामे करणे व तदनुषंगिक इतर कामे करणे.
(For Technical Sanctioned)

Work Marathi Name : हडपसर-मांजरी क्षेत्रीय कार्यालयाचे कार्यक्षेत्रातील रस्त्यांवरील चेंबर्स समपातळीत करणे, RCC चेंबर्स करणे, क्षेत्रीय कार्यालय निहाय मोबाईल मॅटेनन्स युनिटद्वारे देखभाल दुरुस्तीची कामे करणे व तदनुषंगिक इतर कामे करणे. (For Technical Sanctioned)

Amount And Rate in RS

Description	Quantity	Rate/Unit	Amount (₹)
ITEM NO : 1 Excavation for catch / side water gutter in all sorts of soils to the specified section including stacking the excavated stuff in a regular bund and disposing of unsuitable or excess stuff as directed.all sorts of soils. (SSR Item No : 2.18) (PMC ROAD) Item Spec : (MORTH 309) Unique No (93) Rate List Year (2023-2024)	154	125 / Cubic Metre	19250
ITEM NO : 2 Supplying hard murum/ kankar at the road site, including conveying and stacking complete. (SSR Item No : 2.29a) (PMC ROAD) Unique No (103) Rate List Year (2023-2024)	150	1022 / Cubic Metre	153300
ITEM NO : 3 Spreading hard murum/ soft murrum/ gravel or kankar for side width complete (SSR Item No : 2.30) (PMC ROAD) Unique No (105) Rate List Year (2023-2024)	150	83 / Cubic Metre	12450
ITEM NO : 4 Compacting the hard murum side widths including laying in layers on each side with vibratory roller including artificial watering etc. complete. (SSR Item No : 2.31) (PMC ROAD) Unique No (106) Rate List Year (2023-2024)	1200	23 / Square Metre	27600
ITEM NO : 5 Construction of granular sub-base by providing close graded Material, mixing in a mechanical mix plant at OMC, carriage of mixed Material to work site, spreading in uniform layers with motor grader/ Paver on prepared surface and compacting with vibratory roller to achieve the desired density, complete as per clause 401 -- Plant Mix Method and Grading - I Material (SSR Item No : 3.01) (PMC ROAD) Item Spec : (MORTH 401) Unique No (116) Rate List Year (2023-2024)	32	2667 / Cubic Metre	85344



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 6 Transportation of material obtained from excavation including soil, rubble,bricks,RCC concrete, kerb stones, steel railing, iron pipes, channels etc. Obtained from excavation, dismantling, loading in a Truck of minimum 5 Cu M capacity or designed capacity and transporting within the municipal limits or any designated place, unloading, stacking or spreading of material etc. complete. (SSR Item No : 2.39) (PMC ROAD) Unique No (114) Rate List Year (2023-2024)</p>	300	398 / Cubic Metre	119400
<p>ITEM NO : 7 हॉटमिक्स मालाचे पॅचवर्क करणे -(मालाची किमत वगळून) हॉटमिक्स बिटुमिनस मॅकाडम /एस.डी.बी.सी./अस्फालट,कॉक्रीट माल पेव्हरे फिनिशरने पॅचवर्कसाठी पसरवणे ,खड्या भोवती मार्किंग करणे,खड्याच्या कडा उभ्या खोडणे,लूज माल काढून व सर्व बाजू स्वच्छ करणे ,टॅककोट मारणे ,हॉटमिक्स,बिटुमिनस अथवा अस्फालटिक कॉक्रीटचा माल खड्यात भरणे ,लाईन लेवल करणे,पाँवर रोलर अथवा डायनार्पॅक ,व्हायब्रेटर रोलर ने दवाई करणे ,मूळ पृष्ठभाग केंब्रला जुळवणे इ.सह.पूर्ण (As Directed By Engineering In Charge) खड्यातील बेस क्रॉसिंग बी.एम (SSR Item No : 1.15) (PMC ROAD) Unique No (434) Rate List Year (2023-2024)</p>	6000	54 / Square Metre	324000
<p>ITEM NO : 8 पुणे महानगरपालिकेच्या येरवडा येथील हॉट मिक्स प्लान्ट / वॅच निवस प्लान्ट येथे तयार करण्यात आलेला डांबरी निक्स नालाचे मिश्रण प्लान्ट वरून साईट पर्यंत वाहतुक करणे. साईटवर आवश्यकतेनुसार नॅकॅनिकल इनर व कॉम्प्रेसर वापरून रस्त्याची पृष्ठ भागाची साफसफाई करणे राडा रोडा उचलणे इ. सह साईट वर खात्यामार्फत पुरविलेले इन शनची चगठढक डशिलळपळीळेप नुसार फवारणे त्यावर सेन्सर पेव्हरेने डांबरी मिश्रीत नाल पसरणे, वायब्रेटर रोलर वापरून दवाई करणे, सदर कामाकरिता लागणारे कुशल व अकुशल कामगार पुरविणे इ. यामध्ये लिड लिफ्टचा समावेश आहे. नियस नालाये रोलिंग नंतर दुडीत आलेल्या भरांची गाडी २०, २५, ४०, ५० एम. एस. अशी साईन इ. चे सुचनेनुसार ठेवणे. (SSR Item No : 1.01) (PMC ROAD) Unique No (420) Rate List Year (2023-2024)</p>	635	970 / Metric Tonne	615950
<p>ITEM NO : 9 पुणे मनपाच्या येरवडा हॉटनिम प्लान्ट सेथून नमाच्याहीपर्यंत डांबरी नसनालाची वाहतुक करणे (SSR Item No : 1.05) (PMC ROAD) Unique No (424) Rate List Year (2023-2024)</p>	800	450 / Metric Tonne	360000



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 10 Providing and laying Cast in situ/Ready Mix cement concrete in M15 of trap/ granite/quartzite/gneiss metal for foundation / steps including steel centering, formwork, laying/pumping, compacting, roughening them if special finish is to be provided, finishing uneven and honeycombed surface and curing etc. complete. The Cement Mortar 1:3 plaster is considered for rendering uneven and honeycombed surface, only. Newly laid concrete shall be covered by gunny bag, plastic, tarpaulin etc. with fully automatic micro processor based PLC with SCADA enabled concrete Batch mix plant etc. complete. With fine aggregate (Crushed sand VSI Grade) (SSR Item No : 24.04) (PMC ROAD) Item Spec : (Bd.E.2 Page One Number 288 and B.7 Page No 38) Unique No (417) Rate List Year (2023-2024)</p>	20	6677 / Cubic Metre	133540
<p>ITEM NO : 11 Providing and laying Cast in situ/Ready Mix cement concrete in M20 of trap/ granite/quartzite/gneiss metal for steps including steel centering, formwork, laying/pumping, compacting, roughening them if special finish is to be provided, finishing uneven and honeycombed surface and curing etc. complete. The Cement Mortar 1:3 plaster is considered for rendering uneven and honeycombed surface, only. Newly laid concrete shall be covered by gunny bag, plastic, tarpaulin etc. with fully automatic micro processor based PLC with SCADA enabled concrete Batch mix plant etc. complete. With fine aggregate (Crushed sand VSI Grade) (SSR Item No : 24.06) (PMC ROAD) Item Spec : (Bd.E.2 Page One Number 288 and B.7 Page No 38) Unique No (418) Rate List Year (2023-2024)</p>	15	7058 / Cubic Metre	105870
<p>ITEM NO : 12 Providing and fixing factory made Hydraulically pressed Mechanically vibrated and compacted precast inter locking cement concrete paving blocks 100MM thick in M-50 grade of approved size and shape for City streets and roads with high volume/ heavy traffic as specified and as per IS 15658:2006 including cost of all materials, manufacturing, curing, transportation of blocks to work site including loading, unloading and stacking as directed, laying paving blocks in position over prepared bed of natural sand / crushed sand of 50 mm thickness including necessary excavation in all stratas, spreading blinding of fine sand over the prepared bed, compacting blocks by plate vibrator etc. complete. (SSR Item No : 5.21) (PMC ROAD) Item Spec : (IRC-SP-63) Unique No (187) Rate List Year (2023-2024)</p>	150	1232 / Square Metre	184800



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 13 Blasted with colour UV stabilized and made from rich oxides and Providing and fixing factory made Hydraulically pressed Mechanically vibrated and compacted precast inter locking cement concrete paving blocks 80MM thick in M-40 grade of approved size and shape for City streets, small /medium market roads,low volume roads, utility cuts on arterial roads etc. as specified and as per IS 15658:2006 including cost of all materials, manufacturing, curing, transportation of blocks to work site including loading, unloading and stacking as directed, laying paving blocks in position over prepared bed of natural sand / crushed sand of 50 mm thickness including necessary excavation in all stratas, spreading blindge of fine sand over the prepared bed, compacting blocks by plate vibrator etc. complete. (SSR Item No : 5.20) (PMC ROAD) Item Spec : (IRC-SP-63) Unique No (186) Rate List Year (2023-2024)</p>	50	1211 / Square Metre	60550
<p>ITEM NO : 14 60 mm Shot blasted blocks Providing & laying of 60mm thick non slippery concrete paving blocks as per the IS 15658-2006 with face of block. The block should have exposed aggregate, be shot blasted with colour UV stabilized and made from rich oxides and guarantee by manufacturer. Block to be manufactured in fully automatic ISO certified vibration compaction machine having strength of M-40 & cured in controlled temperature through mist and fixing on site with all grit material and labour included. (SSR Item No : 1.03) (PMC ROAD) Unique.No (197) Rate List Year (2023-2024)</p>	150	1056 / Square Metre	158400
<p>ITEM NO : 15 ६० जाडीचा फिश इंटरलॉकिंग ब्लॉक्स पुरविणे व बसविणे १:२ प्रमाणातील चाळलेल्या बादुचे नॉर्ट रंगीत ग्रे पेव्हींग ब्लॉवर पुरविणे, दबाई केलेल्या मुख्य पृष्ठभागावर ५० मि मि जाडीचा वाळूचा / ग्रीट थर पसरविणे, स्क्रिड व्हायब्रेटरचे दबाए/लेवल करणे, दबाई केलेल्या वाहच्या पृष्ठभागावर पेविंग ब्लॉक्स बसवून दर्जामध्ये चाळलेली रिती भरणे तसेच कर्वींग लगतच्या पेविंग ब्लॉक्स व कर्वींग या मधील पोकळमध्ये १:१ सिमेंट मॉर्टर मध्ये दर्जा भरणे, व्हायब्रेटर/कॉम्पॅक्टरच्या सहाय्याने दबाई करणे, पाणी मारणे, सर्व साहित्य मटेरियल लीड लिफ्ट पूर्ण सदर ब्लॉक्सच्या आवश्यकतेनुसार गुणनियंत्रणाच्या चाचण्या येणे आवश्यक आहे. टिप इंटरलॉकिंग ब्लॉक्स पुरविणे व बसविणे या बाबीला स्टार रेट अथवा भाववाद सूत्र अनुज्ञेय नाही. (SSR Item No : 1.05) (PMC ROAD) Unique No (199) Rate List Year (2023-2024)</p>	120	894 / Square Metre	107280
<p>ITEM NO : 16 इंटरलॉकिंग ब्लॉक्स काढून परत बसविणे. १:२ प्रमाणातील चाळलेल्या वाळूचे मॉर्टरमध्ये रंगीत अस्मित्वातील पेव्हींग ब्लॉक्स काढून बसविणे, दबाई केलेल्या मुरुमाच्या पृष्ठभागावर ५० मिमि जाडीचा वाळूचा/ ग्रीटचा थर पसरविणे, स्क्रिड व्हायब्रेटरचे दबाई लेव्हल करणे, दबाई केलेल्या वाळूच्या पृष्ठभागावर पेव्हींग ब्लॉक्स बसवून दर्जामध्ये चाळलेली रिती भरणे, तसेच कर्वींग लगतच्या पेव्हींग ब्लॉक्स व कर्वींग यामधील पोकळी मध्ये १:१ सिमेंट मॉर्टरमध्ये दर्जा भरणे; व्हायब्रेटर/कॉम्पॅक्टरच्या सहाय्याने दबाई करणे, पाणी मारणे, सर्व साहित्य मटेरियल लीड लिफ्ट सह पूर्ण सदर ब्लॉक्सच्या आवश्यकतेनुसार गुणनियंत्रणाच्या चाचण्या येणे आवश्यक आहे (SSR Item No : 1.04) (PMC ROAD) Unique No (198) Rate List Year (2023-2024)</p>	500	220 / Square Metre	110000



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
ITEM NO : 17 Machinery Hire Charges : (With Diesel & Operator / Driver) Roller Vibrator (SSR Item No : 1.23) (PMC ROAD) Unique No (442) Rate List Year (2023-2024)	120	2043 / Hour	245160
ITEM NO : 18 Machinery Hire Charges : (With Diesel & Operator / Driver) JCB (SSR Item No : 1.20) (PMC ROAD) Unique No (439) Rate List Year (2023-2024)	120	1272 / Hour	152640
ITEM NO : 19 Machinery Hire Charges : (With Diesel & Operator / Driver) Dumper (SSR Item No : 1.21) (PMC ROAD) Unique No (440) Rate List Year (2023-2024)	100	973 / Hour	97300
ITEM NO : 20 L type Kerb: Providing & fixing Reinforced precast-L shape kerb stone Using 6 mm steel bars 4 number along the kerb length and 8 mm steel bar 500 mm c/c vertical reinforcement , M-30 grade concrete with dimensions 350 mm high,125 mm thick with built in base of 187 mm x 75 mm, including 2 numbers of 50 mm dia sleeves for services at the top of the base & with top external edge with rounding of 20 mm radius in highly superior quality surface & edge finish in 1 meter length & Painting as per direction of Engineer - in - Charge. (Including excavation for kerbing, lead lift and transportation of excavated material, P.C.C. below kerbing) (SSR Item No : 1.01) (PMC ROAD) Unique No (195) Rate List Year (2023-2024)	40	1333 / Number	53320
ITEM NO : 21 मॅनहोल चेंबर रस्त्याच्या समपातळीत बांधणे फुटपाथ वरील अथवा पदपथ वरील ड्रेनेज, पाणीपुरवठा इ. कामाचे मॅनहोल चेंबर्स वरील कव्हर्स २०० मीमी उंची पर्यन्त रस्त्याच्या समपातळी येईल असे M २५ ग्रेड चे कॉक्रीट व HYSD स्टील (drawing नुसार वापरून करून परत घट्ट बसवणे त्यामध्ये सदरचा चेंबर रस्ता समपातळी मध्ये घेणे तसेच चेंबर भोवती सदर कॉक्रीट वापर करून रस्ता पातळी एक करणे सर्व माल- मजुरी लीड क्युअरिंग इत्यादी सह पूर्ण (SSR Item No : 8.36) (PMC ROAD) Unique No (413) Rate List Year (2023-2024)	80	4253 / Number	340240



पुणे महानगरपालिका, पुणे

82160

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 22</p> <p>Repairing/lifting of circular manhole chamber Demolition of existing circular manhole chamber upto depth as directed by engineer incharge, transportation of demolished material, providing and constructing B.B. masonry in 230 X 100 X 75 mm brick for circular manhole chamber in CM 1:5 proportion, both inside and outside plaster in CM 1:3 with cement finish, 100 mm thick PCC 1:2:4 coping on B.B. masonry, fixing precast S.F.R.C. frame and cover etc. complete as directed by Engineer-in-charge. Note : Wall thickness : 0.23 M for depth of 2.0 M and 0.35 M for balance depth exceeding 2.0 M. Add/rebate for every increase in depth of 50 cm or part thereof for all dia of circular manhole chamber</p> <p>(SSR Item No : 94.viii) (PMC Drainage) Unique No (19341) Rate List Year (2024-2025)</p>	20	4108 / 50 cm depth	82160
<p>ITEM NO : 23</p> <p>Providing and fixing in position steel fibre reinforced concrete (S.F.R.C.) frame and covers (M40 grade) (Plain or Storm Water Drain) heavy duty of approved make including loading, unloading, transportation, production year and Pune Municipal Corporation, on top must be embossed. etc. complete as directed by Engineer-in-charge (20 tonnes capacity). The Bidder shall procure RCC pipes and chamber covers from following suppliers 1) M/S Sneh Precast 2) M/S Kalokhe pipes and precast industries 3) M/S Poona Concrete Company If bidder wish to supply RCC pipes and chamber covers other than above suppliers, then it is mandatory to take approval of supplier from concern department; Third party inspection of RCC pipes and chamber covers is mandatory and should be witnessed by EIL/IR CLASS/SGS. The cost of third party inspection should be borne by contractor. 90 x 90 cm size</p> <p>(SSR Item No : 60.v) (PMC Drainage) Unique No (19229) Rate List Year (2024-2025)</p>	40	4776 / Number	191040
<p>ITEM NO : 24</p> <p>Providing and fixing in position steel fibre reinforced concrete (S.F.R.C.) frame and covers (M40 grade) (Plain or Storm Water Drain) heavy duty of approved make including loading, unloading, transportation, production year and Pune Municipal Corporation, on top must be embossed. etc. complete as directed by Engineer-in-charge (20 tonnes capacity). The Bidder shall procure RCC pipes and chamber covers from following suppliers 1) M/S Sneh Precast 2) M/S Kalokhe pipes and precast industries 3) M/S Poona Concrete Company If bidder wish to supply RCC pipes and chamber covers other than above suppliers, then it is mandatory to take approval of supplier from concern department. Third party inspection of RCC pipes and chamber covers is mandatory and should be witnessed by EIL/IR CLASS/SGS. The cost of third party inspection should be borne by contractor. 90 x 60 cm size</p> <p>(SSR Item No : 60.vii) (PMC Drainage) Unique No (19231) Rate List Year (2024-2025)</p>	40	3973 / Number	158920



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 25 Providing and fixing in position steel fibre reinforced concrete (S.F.R.C.) frame and covers (M40 grade) (Plain or Storm Water Drain) heavy duty of approved make including loading, unloading, transportation, production year and Pune Municipal Corporation, on top must be embossed. etc. complete as directed by Engineer-in-charge (20 tonnes capacity). The Bidder shall procure RCC pipes and chamber covers from following suppliers 1) M/S Sneh Precast 2) M/S Kalokhe pipes and precast industries 3) M/S Poona Concrete Company If bidder wish to supply RCC pipes and chamber covers other than above suppliers, then it is mandatory to take approval of supplier from concern department. Third party inspection of RCC pipes and chamber covers is mandatory and should be witnessed by EIL/IR CLASS/SGS. The cost of third party inspection should be borne by contractor. 60 x 60 cm size (SSR Item No : 60.viii) (PMC Drainage) Unique No (19232) Rate List Year (2024-2025)</p>	20	3629 / Number	72580
<p>ITEM NO : 26 पावसाळी चेंबर्सवरील लोखंडी जाळ्या पुरविणे. आतील मापाचे चेंबर्सवरील मान्य डिझाईनच्या व ड्रॉईंगच्या नुसार हाय ड्युटी लोखंडी जाळ्या फोमसह पुरविणे, दोन हात रेड ऑक्सार्ड प्रायमर मारून त्यावर काळ्या रंगाचा ऑईल पेंटचे दोन हात मारणे व M20 कॉक्रीटमध्ये 100 mm जाडीचे कोपींग करून त्यामध्ये घट्ट बसविणे, रस्त्याच्या समपातळीत आणणे, सर्व माल - मजुरी, लिड, लिफ्ट, क्युअरिंग इत्यादीसह पूर्ण. पावसाळी चेंबर्सवरील लोखंडी जाळ्या पुरविणे. (SSR Item No : 89.i) (PMC Drainage) Unique No (19315) Rate List Year (2024-2025)</p>	1200	90 / Kilogram	108000
<p>ITEM NO : 27 Routine Maintenance (maintenance, like cleaning of median, kerbs, cleaning of Road and furnitures, trimming of tree branches, removal of debris, painting with enamel paint, cement paint, replacing the damaged chamber covers, removal of damaged poles of signages, lamps, railings, removing grass, shrubs, vegetation, cleaning of Thermoplastic paint and minor repair of chamber, divider, footpath etc, stacking damaged material to PMC store and other works as instructed by Executive Engineer.) to be done by Road maintaine Utility Vehicle as with Equipped team of 4 Labours with supervisor in one shifts. This item includes vehical with driver and diesel,supervisor,4 labour and excluding material cost. The vehical should have GPS system. (SSR Item No : 8.37) (PMC ROAD) Unique No (414) Rate List Year (2023-2024)</p>	12	165925 / Per Month	1991100



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 28 DENSE BITUMINOUS MACADAM WITH SCADA: Proving and laying dense bituminous macadam using crushed aggregates of Grading I, premixed with bituminous binder of specified grade of Bitumen @ 4.50 per cent by weight of total mix and filler, transported to site with VTS , laid over a previously prepared surface, finished to the required grade, level, alignment, and rolling to achieve the desired density for 76-100 mm compacted thickness .USING Batch mix type hot mix plant with SCADA, Sensor Paver with scada, vibratory roller with scada.with Stone Dust filler.(VG-30 bulk bitumen rates are considered to arrive at rates) (SSR Item No : 3.44) (PMC ROAD) Item Spec : (MORTH 505) Unique No (159) Rate List Year (2023-2024)</p>	100	10993 / Cubic Metre	1099300
<p>ITEM NO : 29 BITUMINOUS CONCRETE WITH SCADA:- Providing and laying bituminous concrete using crushed aggregates of grading II, premixed with bituminous binder @ 6% per cent by weight of total mix and filler, transported to site with VTS , laid over a previously prepared surface, finished to the required grade, level, alignment, and rolling to achieve the desired compaction for 50 mm compacted thickness with specified grade of Bitumen.Excluding prime / tack coat. For Bitumen of specified grade -- USING Batch mix type hot mix plant with Sensor Paver with scada, vibratory roller with scada.r with Stone Dust filler. (VG-40 bulk bitumen rates are considered) (SSR Item No : 3.51) (PMC ROAD) Unique No (628) Rate List Year (2024-2025)</p>	15	13353 / Cubic Metre	200295
<p>ITEM NO : 30 आय.आर.सी १९-१९८८ नुसार गतिरोधक निर्माण करणे. मनपाच्या हॉट मिक्स प्लांट वरील डाबरी मिक्स मटेरिअल २मीx१.०सेमी मापाचा आयताकृती मध्यभाग लोखंडी चनल च्या सहायाने भरणे व तदंतर दोन्ही बाजूकडील १.५ मी लांबीचा ऊताराचा भाग (१:२०),आय.आर.सी १९-१९८८ मधील रेखाचित्रानुसार भरून रोलर च्या सहायाने दृढीभूत करणे इ.पूर्ण यामध्ये रहदारी नियंत्रण,बरीकेटींग,सूचना फलक इ. अंतर्भूत (SSR Item No : 1.27) (PMC ROAD) Unique No (446) Rate List Year (2023-2024)</p>	30	2074 / Running Metre	62220



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 31 Providing and fixing Mandatory/Regulatory sign boards in circular shape of _____ mm dia made out of _____mm aluminum sheet bonded with white retro reflective sheeting of Class B (Type IV High intensity micro-prismatic grade sheeting-HIP) having pressure sensitive/heat activated adhesive retroreflective specified back ground, border and back side retroreflective symbols, letters, numerals, arrow as per IRC:67-2012 Table No 8.3 Supported with back support frame 25mm x 25mm x 3mm, duly painted on back side with grey stove enamel paint and supported on one no. of M. S. angle iron post of size 65 mm X 65 mm X 6 mm, 3.45 m long, duly painted with with flat oil paint having alternate black and white bands of 25 cm width including G.I. fixtures etc; fixing the boards in M25 grade concrete block of size 60cm X 60cm X 75cm including transportation etc; complete. Class B (Type IV High intensity micro-prismatic grade sheeting-HIP) shall have 7 years written warranty from the manufacturer and authorised distributor/convertor issued for field performance including the screen printed areas and cut-out sheeting and cut-out durable transparent overlay film and this warranty certificate in original should be submitted to the Engineer in charge by the contractor/supplier. 600 mm dia made out of 1.5mm aluminum sheet (SSR Item No : 6.27a) (PMC ROAD) Item Spec : (MORTH 801) Unique No (269) Rate List Year (2023-2024)</p>	40	4623 / Number	184920



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 32 Providing and fixing of retro reflectorised-informatory sign board rectangular/Square in shape having area less than 0.9 One Square Meterr made out of ____mm aluminum sheet bonded with white retro reflective sheeting of Class __ (Type IV High intensity micro- prismatic grade sheeting-HIP) having pressure sensitive/heat activated adhesive retoreflective specified back ground, border and back side retoreflective symbols, letters, numerals, arrow as per IRC:67-2012 Table No 8.3, supported with back support frame 25mm x 25mm x 3mm, duly painted on back side with two coats of grey stove enamel paint and supported on one no. mild steel angle iron post 75 mm x 75 mm x 6 mm, 3.5 mt long firmly fixed to the ground by means of properly designed foundation with M25 grade cement concrete 45 cm x 45 cm x 60 cm, 60 cm below ground level as per approved drawing The angle iron post shall be duly painted with one coat of epoxy primer and two coats of epoxy finish paints having alternate black and white bands of 25 cm width including GI fixtures and transportation etc.complete.The nut bolts of board with angle iron post/supporting structure after fixing at site has to be electrically welded. Class B (Type IV High intensity micro-prismatic grade sheeting-HIP) sheeting shall have 7 years written warranty from the manufacturer and authorised distributor/convertor issued for field performance including the screen printed areas and cut-out sheeting and cut-out durable transparent overlay film and this warranty certificate in original should be submitted to the Engineer in charge by the contractor/supplier. 2mm aluminum sheet Class B (SSR Item No : 6.33a) (PMC ROAD) Item Spec : (MORTH 801) Unique No (309) Rate List Year (2023-2024)</p>	20	9810 / Square Metre	196200
<p>ITEM NO : 33 Supply & Fixing precast cement concrete cylindrical Bollard of size as per specifications & 900 mm height (650mm above finish level) manufactured by M-30 grade of concrete by vibro compaction process using FRP moulds & with washed fine grit finish on the exposed surface of the bollard of approved water base PU paint colour & texture, (single & Double strip) as per detail drawing as directed by Engineer in charge. (SSR Item No : 1.06) (PMC ROAD) Unique No (200) Rate List Year (2023-2024)</p>	20	1912 / Number	38240
<p>ITEM NO : 34 Supply & Fixing precast cement concrete cylindrical Bollard of size as per specifications & 600 mm height (450mm above finish level) manufactured by M-30 grade of concrete by vibro compaction process using FRP moulds & with washed fine grit finish on the exposed surface of the bollard of approved water base PU paint colour & texture, (single & Double strip) as per detail drawing as directed by engineer in charge. (SSR Item No : 1.07) (PMC ROAD) Unique No (201) Rate List Year (2023-2024)</p>	30	1712 / Number	51360



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
ITEM NO : 35 Providing and applying two coats (exterior quality) of flat oil paint of approved colour and shade to the plastered surface in buildings and workshops including scaffolding if necessary, cleaning the surface and preparing surface etc. complete. (excluding primer coat) (SSR Item No : 35.11) (PMC Bhavan) Unique No (15562) Rate List Year (2024-2025)	150	92 / Square Metre	13800
ITEM NO : 36 Dewatering the excavated trenches and pools of water in the building trenches / pipeline trenches, well works by using pumps and other devices including disposing off water to safe distance as directed by Engineer-in-charge (including cost of machinery, labour, fuel), etc. complete. (Bd-A-9/261) Dewatering the excavated trenches and pools of water in the building trenches / pipeline trenches, well works by using pumps and other devices (SSR Item No : 37) (PMC Drainage) Unique No (19037) Rate List Year (2024-2025)	315	93 / HP/ Hr.	29295
ITEM NO : 37 Providing and laying Controlled Low Strength Material (CLSM) having 7 days strength between 2 to 8 MPA as a fill for narrow trenches manufactured as per the guidelines and specifications given in IRC 98 and using Portland Cement, Fly Ash or GGBS and aggregate with water and required Admixtures as per mix design approved by PMC and prepared in SCADA based RMC plant and transported to site in transit mixer and laid and finished using manual means and curing for min 7 days etc complete (SSR Item No : 1) (PMC NON-DSR) Unique No (22042501) Rate List Year (2024-2025)	70	2540 / Cubic Metre	177800



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 38 Providing, repairing and raising existing inspection chamber / utility chamber/storm water chamber / manhole in size 1.50 m x 1.50 m to the required finished road level, Including groove cutting 60 mm wide for cutting depth up to 250 mm, dismantling and removal of existinig flexible pavement and unsuitable material up to a depth of 350 mm, providing and laying M-40 TWT (Transit Mixed) concrete for repalring and raising works up to a depth of 200 mm with proper compaction, finishing and curing; providing and laying chemical-based concrete macadam up to a thickness of 75 mm, providing and applying tack coat using VG-30 bitumen over the prepared surface, providing and laying bituminous concrete of thickness 75 mm with rolling and finishing to match the existing road profile, sealing joints with approved bitumen / emulsion along the cutting edges of 1.50 m x 1.50 m and along the chamber frame to prevent ingress of water, including cleaning the site, restoring the pavement to original condition, and all materials, labour, machinery, leads, lifts, traffic management, safety measures and incidental works complete as per PMC / MORTH specifications and as directed by the Engineer-in-Charge. (Excluding chamber frame and cover). As per Attach RA (SSR Item No : 1) (PMC NON-DSR) Unique No (23012601) Rate List Year (2025-2026)</p>	10	11040 / Per No	110400
<p>ITEM NO : 39 Providing, repairing and ralsing existing Inspection chamber/utility chamber/storm water chamber/manhole In size 1.75 mx 1.75 m to the required finished road level, including groove cutting 60 mm wide for cutting depth up to 250 mm, dismantling and removal of existing flexible pavement and unsuitable material up to a depth of 350 mm, providing and laying M-40 TWT (Transit Mixed) Chemical Based concrete for repalring and raising works up to a depth of 200 mm with proper compaction, finishing and curing, providing and laying chemical-based concrete macadam up to a thickness of 75 mm, providing and applying tack coat using VG-30 bitumen over the prepared surface, providing and laying bituminous concrete of thickness 75 mm with rolling and finlshing to match the existing road profile, sealing joints with approved bitumen/emulsion along the cutting edges of 1.75 m x 1.75 m and along the chamber frame to prevent Ingress of water, Including cleaning the site, restoring the pavement to original condition, and all materials, labour, machinery, leads, lifts, traffic management, safety measures and Incidental works complete as per PMC/MORTH specifications and as directed by the Engineer-In-Charge. (Excluding chamber frame and cover). (SSR Item No : 2) (PMC NON-DSR) Unique No (23012602) Rate List Year (2025-2026)</p>	10	14854 / Per No	148540



पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
ITEM NO : 40 Providing and fabricating structural steel work in rolled sections like joists, channels, angles, tees etc. as per detailed design and drawings or as directed including cutting, fabricating, hoisting, erecting, fixing in position making riveted / bolted /welded connections without connecting plates, braces etc. and including one coat of anticorrosive paint and over it two coats of oil painting of approved quality and shade etc. complete. (SSR Item No : 23.01) (PMC Bhavan) Unique No (15297) Rate List Year (2024-2025)	0.5	106936 / Metric Tonne	53468
Total For Sub Work: Eighty Four Lakhs Thirty Six Thousand Thirty Two Rupees			8436032

-----End Of Content-----

Beli


Pratik Shamuvel Dalvi
कनिष्ठ अभियंता / शाखा अभियंता
विकेंद्रित कामे परिमंडळ क्र.४
पुणे महानगरपालिका

SJ

Sunil Jaysingh Rao Patil
उप अभियंता
विकेंद्रित कामे परिमंडळ क्र.४
पुणे महानगरपालिका

Ramesh Waghmare

Ramesh Waghmare
कार्यकारी अभियंता
विकेंद्रित कामे परिमंडळ क्र.४
पुणे महानगरपालिका

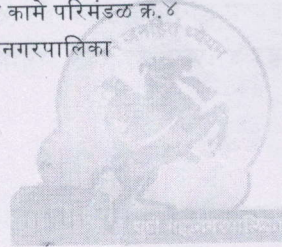



पुणे महानगरपालिका, पुणे

PMC/ZONE-4/HADAPSAR/EX-2

2026

टेंडर गोषवारा

टेंडर क्रमांक:

१. ठेकादाराचे नाव व पत्ता:

२. कामाचे नाव: हडपसर-मांजरी क्षेत्रीय कार्यालयाचे कार्यक्षेत्रातील रस्त्यांवरील चॅम्बर्स समपातळीत करणे, RCC चॅम्बर्स करणे, क्षेत्रीय कार्यालय निहाय मोबाईल मॅटेनन्स युनिटद्वारे देखभाल दुरुस्तीची कामे करणे व तदनुषंगिक इतर कामे करणे.

३. टेंडर / कोटेशन बाबींची पुर्वगणित रक्कम रुपये: **Rs.8436032/-**

४. ठेकेदाराने रोख भरावयाची बयाना रक्कम (अंदाजे 1% टक्के) रक्कम रुपये **Rs. 84360/-** (Online / NEFT / RTGS)

५. अ) यशस्वी ठेकेदाराने अनामत रक्कम (अंदाजे 4 टक्के) रक्कम रुपये **Rs. 337441/-** प्रथम बिलामधून कपात करण्यात येईल .

ब) ज्या कामाची रनिंग बिले तीन पेक्षा जास्त होणार नाहीत, त्यांची राहिलेली ४ टक्के अनामत रक्कम प्रथम बिलामधून वसूल करण्यात येईल.

क) चार पेक्षा जास्त बिले होणार असल्यास ५०% टक्के काम होईपर्यंत प्रत्येक रनिंग बिलामधून १ टक्के अनामत रक्कम कापून घेण्यात येईल व अंतिम बिलापूर्वीच्या बिलातील जाहीर टेंडर रक्कमेच्या ४ टक्का अनामत रक्कम कापण्यात येईल.

६. काम पूर्ण करण्या साठी मुदत **12** महिने

७. डिफेक्ट लायबिलिटी पिरीयड **24** महिने हा कालावधी पूर्ण होईपर्यंत संपूर्ण अनामत रक्कम रोखून धरली जाईल.

८. काम मुदतीत न झाल्यास करण्यात येणाऱ्या कमाल दंडाबाबतच्या अटी सोबत जोडल्या आहेत.

९. कामासाठी ठेकेदारास म.न.पा. ने पाणीपुरवठा केल्यास आकरण्यात येईल दर :

अ) मीटरने पुरविल्यास प्रचलित दर 0

ब) मीटरखेरीज कनेक्शन दिल्यास दरमहा रु **300/-**

अथवा प्रत्येक सिमेंट पोत्यास रक्कम रु ४ /-

प्रमाणे (१०० पोत्यांपेक्षा कमी वापर असल्यास) जो दर कमी येईल तो घेणे

६. काम पूर्ण करण्या साठी मुदत **12** महिने

१०. ठेकेदाराने टेंडर / कोटेशन गोषवारा (फॉर्म, समरी शीट) व मेमोरेंडमवर स्वाक्षरी करणे आवश्यक आहे

११. टेंडर विक्रीचा दिनांक ते दिनांक पर्यंत दुपारी वाजेपर्यंत

राहिल व टेंडर स्वीकारण्याचा दिनांक रोजी दुपारी वाजेपर्यंत राहिल.

१२. ठेकेदाराने मेमोरांडम मधील दिलेल्या युनिट प्रमाणे दर देणे आवश्यक आहे. त्यात बदल करता कामा नये. टेंडर दिल्यानंतर



पुणे महानगरपालिका, पुणे

त्यात कोणताही बदल केला जाणार नाही व दिलेल्या दरानेच टेंडरची रक्कम काढली जाईल. युनिट बदलून दर दिल्यास त्या (टेंडरचा) विचार केल जाणार नाही.


१३. टेंडर स्वीकृतीसाठी टेंडरमधील दर ठेकेदारास 12 महिने मुदती पर्यंत बंधन कारक राहिल.

Terms and Conditions:

Pratik Shamuvel Dalvi
कनिष्ठ अभियंता / शाखा अभियंता
कार्यालय(हडपसर- मांजरी)
पुणे महानगरपालिका

Sunil Jaysingh Rao Patil
उप अभियंता
कार्यालय(हडपसर- मांजरी)
पुणे महानगरपालिका

Ravi Ashokrao Khandare (Prabhari)
महापालिका सहाय्यक आयुक्त
कार्यालय(हडपसर- मांजरी)
पुणे महानगरपालिका




राज्य निवडणूक आयोग
महाराष्ट्र


प्रभाग क्र : १६

हडपसर - सातववाडी	
प्रभाग लोकसंख्या	
एकूण	९२२३२
अ.जा.	९५५२
अ.ज.	६९०

Key Map

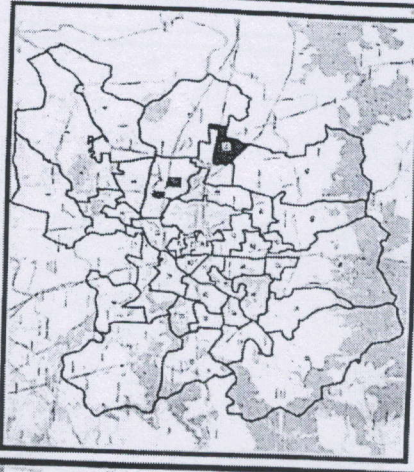

- Legend**
- Ward2025
 - MC_Boundary
 - Road
 - National Highway
 - Railway Line
 - River

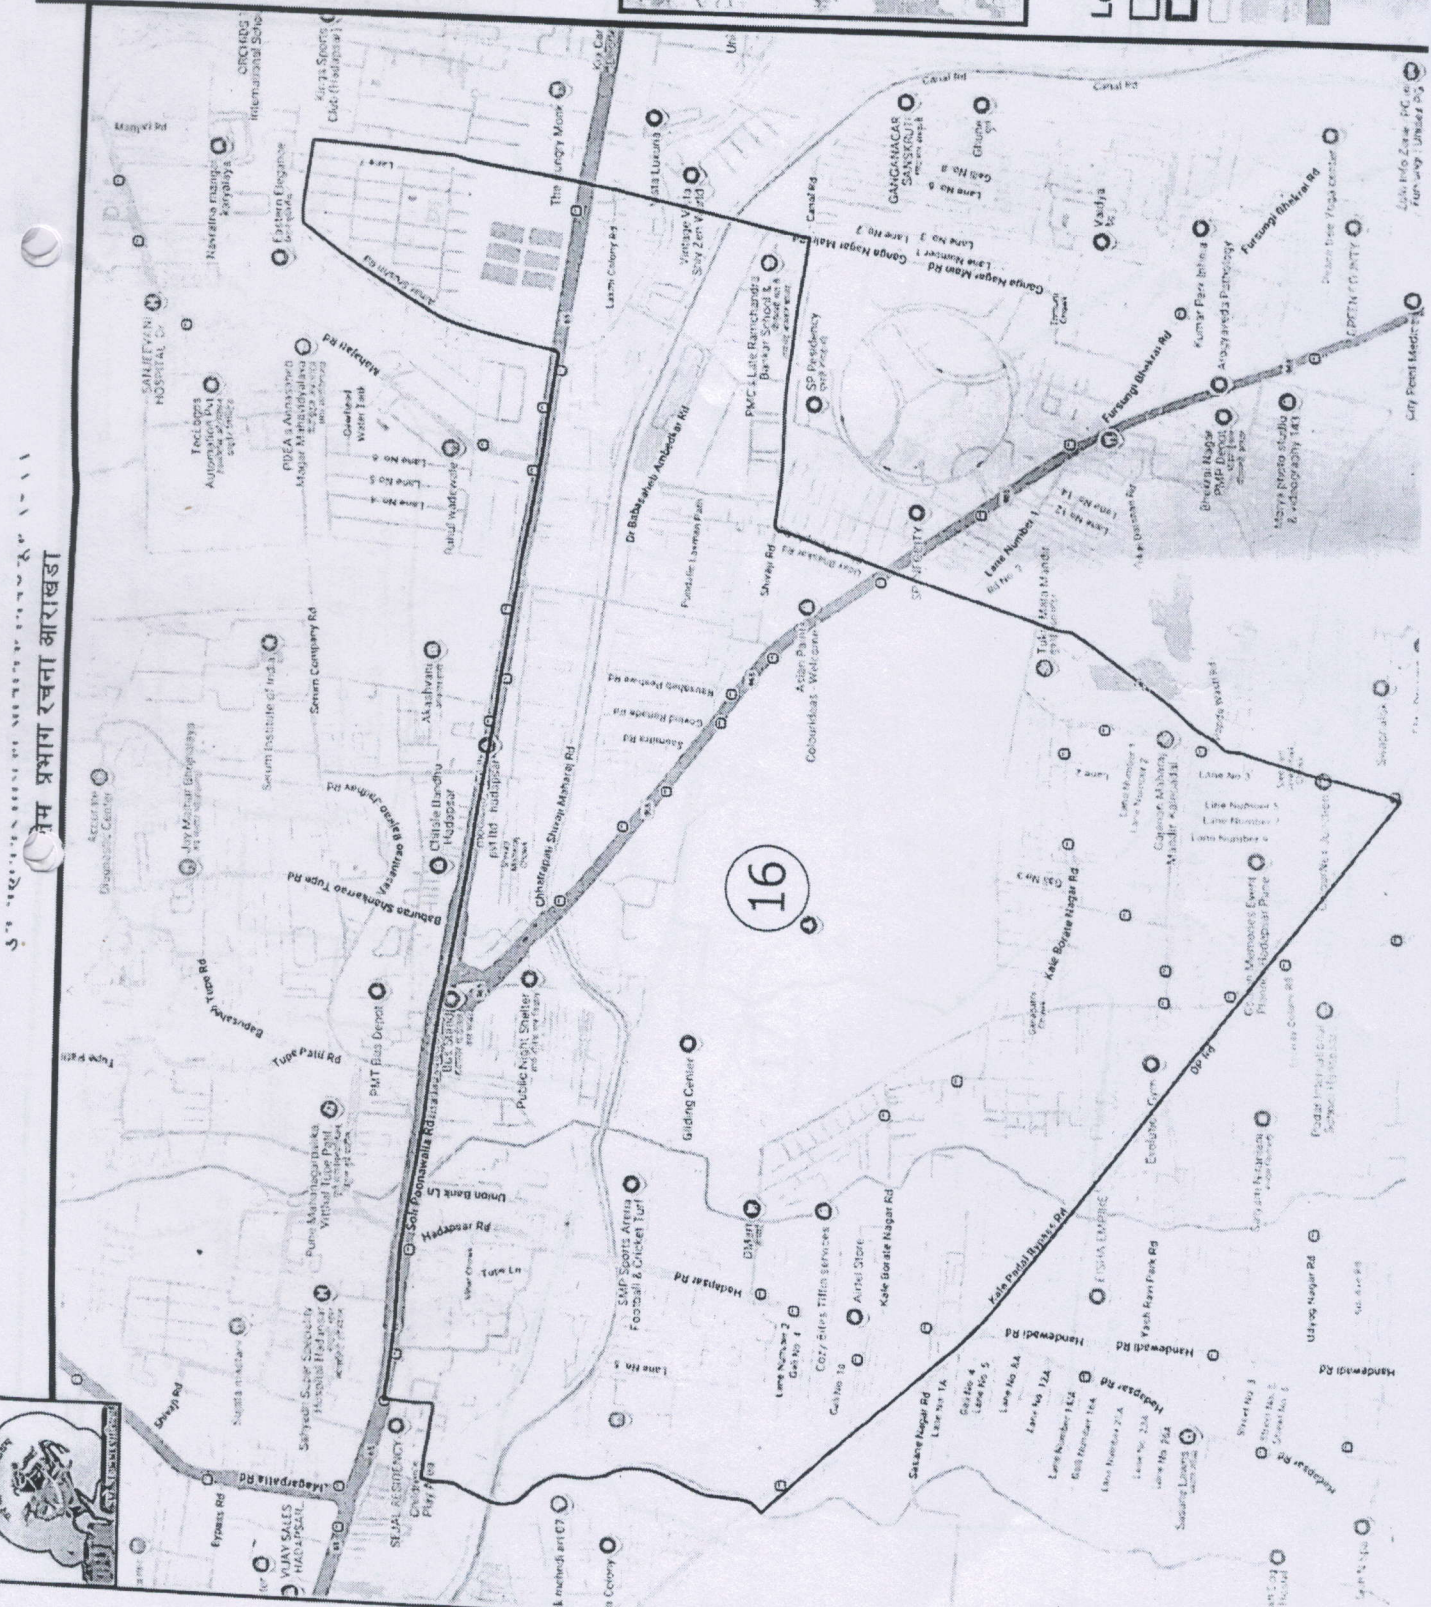

प्रभाग रचना आराखडा

कनिष्ठ अभियंता
हडपसर

Percentage BoQ

Validate Print Help

Tender Inviting Authority: JMC-DMC-4

Name of Work: हडपसर - मांजरी क्षेत्रीय कार्यालयांचे कार्यक्षेत्रातील रस्त्यांवरील चेंबर्स समाप्तकी करणे, RCC चेंबर्स करणे, क्षेत्रीय कार्यालय निहाय मोबाइल मॉनिटरिंग देखभाल दुरुस्तीची कामे करणे व तदनुषंगिक इतर कामे करणे.

Contact No: श्री.अनंत ठोक 7057961761

Name of the Bidder/ Bidding Firm /									
PRICE SCHEDULE									
(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)									
NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	NUMBER #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	Estimated Rate in Rs. P	TOTAL AMOUNT Without Taxes in Rs. P	TOTAL AMOUNT With Taxes	TOTAL AMOUNT In Words		
1	हडपसर - मांजरी क्षेत्रीय कार्यालयांचे कार्यक्षेत्रातील रस्त्यांवरील चेंबर्स समाप्तकी करणे, RCC चेंबर्स करणे, क्षेत्रीय कार्यालय निहाय मोबाइल मॉनिटरिंग देखभाल दुरुस्तीची कामे करणे व तदनुषंगिक इतर कामे करणे.	4	5	6	53	54	55		
1	providing RMV	3.500	per month	1,65,925.00	580737.50	580737.50	INR Five Lakh Eighty Thousand Seven Hundred & Thirty Seven and Paise Fifty Only		
2	DBM	30.000	CUBIC METER	10,995.00	329790.00				
3	pavsall jalya	3600.000	kg	90.00	324000.00				
Total in Figures					580737.50	580737.50	INR Five Lakh Eighty Thousand Seven Hundred & Thirty Seven and Paise Fifty Only		
Quoted Rate in Figures					0.00	0.00	INR Zero Only		
Quoted Rate in Words					INR Zero Only				


PMCZONE-4/HADAPSAR/2026/EX-2


 कार्यालय मांजरी
 हडपसर-मांजरी क्षेत्रीय कार्यालय
 पुणे महानगरपालिका

पथ विभागाकडील रिईनस्टेटमेंटच्या कामासाठी विशेष निविदा अटी व शर्ती

१. सदर कामासाठी ठेकेदाराकडे स्वतःची अथवा भाडेतत्वावर वाहने असणे बंधनकारक आहे. त्याबाबतची कागदपत्रे निविदेसोबतच जोडणे बंधनकारक राहिल.
२. निविदा भरल्यानंतर निविदा छाननीत पात्र निविदाधारकांची बीड कॅप्सिटी व फायनान्सियल कॅप्सिटी मर्यादा संपल्यानंतर पुढील निविदा L2 / L3 दराचे निविदा धारकाची पात्रता तपासून निवदेमधील L1 दरापेक्षा कमी दराने L2 / L3 निविदाधारकास रितसर काम देण्यात येईल.
३. सदर कामाच्या ठेकेदार यांनी प्रत्येक महिन्याच्या शेवटी प्रत्यक्ष काम करताना होणारा बदल बचतवाढ तक्त्यात अंतर्भूत करून संबंधित कार्यकारी अभियंता यांना सादर करावा व त्यानुसार संभाव्य बचतवाढ तक्ता मान्य करून घ्यावा. अंतिम बचतवाढ तक्त्यात मान्य मर्यादेपेक्षा जादा बाबींचा विचार करण्यात येणार नाही.
४. सदर कामाची देयके दर तीन महिन्यांनी ठेकेदार यांनी संबंधित कार्यकारी अभियंता यांना सादर करावीत व अशा प्रकारे बिल सादर न केल्यास सदर बिलाची जबाबदारी खात्याची राहणार नाही. बिल तरतुदीअभावी अदा न झाल्यास त्याची सर्वस्वी जबाबदारी ठेकेदाराची राहिल.
५. निविदा संचालन अन्यत्र काहीही समकक्ष सूचना आढळून आल्यास, वरील अटीशर्तींच अंतीम राहतील.
६. मा. शहर अभियंता यांनी कार्यालयीन परिपत्रक क्रं.पथ/६६४७ दि. ११/११/२०२२ नुसारच दुरुस्तीची कामे करण्यात यावीत.
७. खड्डे दुरुस्तीसाठी खड्डा चौकोनी / आयताकार करणेकामी जनरेटवर चालणा-या कटर/ब्रेकरची व्यवस्था असणे आवश्यक आहे.

पुणे महानगरपालिका
मा. अति. महानगरपालिका आयुक्त (प्र./वि./अ)
ठरव क्र. ९/१००६
दिनांक २९/०२/२०२४

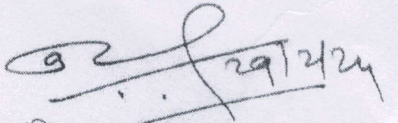
(विकास ढाकणे)

अति.महापालिका आयुक्त (वि)
पुणे महानगरपालिका

