



# पुणे महानगरपालिका, पुणे

PMC/ZONE-4/HADAPSARI/EXE-03

2026

## Tender Abstract

**Work Name :** हडपसर - मांजरी क्षेत्रीय कार्यालयांचे कार्यक्षेत्रात प्रभाग क्र.17 विविध रस्त्यांवर पाणीपुरवठा वाहीनी /मल:निसारण वाहीनी / गॅस वाहीनी / वीज वाहीनी तसेच केबल खोदाईचे रिईन्स्टेटमेंट करणे तसेच इतर तद्. कामे करणे.  
(For Technical Sanctioned)

**Work Marathi Name :** हडपसर - मांजरी क्षेत्रीय कार्यालयांचे कार्यक्षेत्रात प्रभाग क्र.17 विविध रस्त्यांवर पाणीपुरवठा वाहीनी /मल:निसारण वाहीनी / गॅस वाहीनी / वीज वाहीनी तसेच केबल खोदाईचे रिईन्स्टेटमेंट करणे तसेच इतर तद्. कामे करणे. (For Technical Sanctioned)

### Amount And Rate in RS

Description	Quantity	Rate/Unit	Amount (₹)
ITEM NO : 1 Excavation for catch / side water gutter in all sorts of soils to the specified section including stacking the excavated stuff in a regular bund and disposing of unsuitable or excess stuff as directed all sorts of soils. ( SSR Item No : 2.18 ) (PMC ROAD ) Item Spec : (MORTH 309) Unique No (93) Rate List Year (2023-2024)	1680	125 / Cubic Metre	210000
ITEM NO : 2 Transportation of material obtained from excavation including soil, rubble,bricks,RCC concrete, kerb stones, steel railing, iron pipes, channels etc. Obtained from excavation, dismantling, loading in a Truck of minimum 5 Cu M capacity or designed capacity and transporting within the municipal limits or any designated place, unloading, stacking or spreading of material etc. complete. ( SSR Item No : 2.39 ) (PMC ROAD ) Unique No (114) Rate List Year (2023-2024)	1701	398 / Cubic Metre	676998
ITEM NO : 3 Dismantling of cement concrete pavement by mechanical means using pneumatic tools, breaking to pieces not exceeding 0.02 cum in volume and stock piling at designated locations and disposal of dismantled materials up to all leads stacking serviceable and unserviceable materials separately etc. complete. ( SSR Item No : 3.11 ) (PMC ROAD ) Item Spec : (MORTH 202) Unique No (128) Rate List Year (2023-2024)	50	1455 / Cubic Metre	72750
ITEM NO : 4 क्रश सॅंड पुरवठा करणे मान्य दर्जाची व गुणवत्तेची स्वच्छ कठीण,टिकाऊ क्रश सॅंड पुणे मनपाच्या हद्दीत सूचनेप्रमाणे पुरविणे सदरची क्रश सॅंड आय.एस. ३८३ प्रमाणे असणे आवश्यक आहे.(As Directed By Engineering In Charge) ( SSR Item No : 1.13 ) (PMC ROAD ) Unique No (432) Rate List Year (2023-2024)	10	1611 / Cubic Metre	16110



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
ITEM NO : 5 Supplying hard murum/ kankar at the road site, including conveying and stacking complete. ( SSR Item No : 2.29a ) (PMC ROAD ) Unique No (103) Rate List Year (2023-2024)	30	1022 / Cubic Metre	30660
ITEM NO : 6 Spreading hard murum/ soft murrum/ gravel or kankar for side width complete ( SSR Item No : 2.30 ) (PMC ROAD ) Unique No (105) Rate List Year (2023-2024)	30	83 / Cubic Metre	2490
ITEM NO : 7 Compacting the hard murum side widths including laying in layers on each side with vibratory roller including artificial watering etc. complete. ( SSR Item No : 2.31 ) (PMC ROAD ) Unique No (106) Rate List Year (2023-2024)	30	23 / Square Metre	690
ITEM NO : 8 Providing and laying in-situ M30 Grade unreinforced plain cement concrete pavement over a prepared sub base with 43 grade cement, coarse and fine aggregate( natural sand/ VSI grade finely washed crushed sand) conforming to IS 383, using fine and coarse aggregates combined gradation as per Table 600-3 of MORTH Specification 2013, mixed in a batching and mixing plant with scada as per approved mix design, admixtures, transporting to site, spreading, laying with skid vibrator, compacted and finished in a continuous operation, finishing to lines and grades as directed by Engineer-in-charge and curing by curing compound /by providing cement vata in cement Mortar 1:8 @0.6m X 0.6m centre to centre, admeasuring 80 mm at bottom and 40 mm at top with depth of 75mm and maintaining the same throughout curing period by any other method approved by Engineer-in-charge. ( SSR Item No : 5.01 ) (PMC ROAD ) Item Spec : (MORTH 602) Unique No (173) Rate List Year (2023-2024)	20	8605 / Cubic Metre	172100



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 9 Providing, repairing and raising existing inspection chamber / utility chamber/storm water chamber / manhole in size 1.50 m x 1.50 m to the required finished road level, Including groove cutting 60 mm wide for cutting depth up to 250 mm, dismantling and removal of existing flexible pavement and unsuitable material up to a depth of 350 mm, providing and laying M-40 TWT (Transit Mixed) concrete for repalring and raising works up to a depth of 200 mm with proper compaction, finishing and curing, providing and laying chemical-based concrete macadam up to a thickness of 75 mm, providing and applying tack coat using VG-30 bitumen over the prepared surface, providing and laying bituminous concrete of thickness 75 mm with rolling and finishing to match the existing road profile, sealing joints with approved bitumen / emulsion along the cutting edges of 1.50 m x 1.50 m and along the chamber frame to prevent ingress of water, including cleaning the site, restoring the pavement to original condition, and all materials, labour, machinery, leads, lifts, traffic management, safety measures and incidental works complete as per PMC / MORTH specifications and as directed by the Engineer-in-Charge. (Excluding chamber frame and cover). As per Attach RA ( SSR Item No : 1 ) (PMC NON-DSR ) Unique No (23012601) Rate List Year (2025-2026)</p>	7	11040 / Per No	77280
<p>ITEM NO : 10 Providing, repairing and ralsing existing Inspection chamber/utility chamber/storm water chamber/manhole In size 1.75 mx 1.75 m to the required finished road level, including groove cutting 60 mm wide for cutting depth up to 250 mm, dismantling and removal of existing flexible pavement and unsuitable material up to a depth of 350 mm, providing and laying M-40 TWT (Transit Mixed) Chemical Based concrete for repalring and raising works up to a depth of 200 mm with proper compaction, finishing and curing, providing and laying chemical-based concrete macadam up to a thickness of 75 mm, providing and applying tack coat using VG-30 bitumen over the prepared surface, providing and laying bituminous concrete of thickness 75 mm with rolling and finishing to match the existing road profile, sealing joints with approved bitumen/emulsion along the cutting edges of 1.75 m x 1.75 m and along the chamber frame to prevent Ingress of water, Including cleaning the site, restoring the pavement to original condition, and all materials, labour, machinery, leads, lifts, traffic management, safety measures and Incidental works complete as per PMC/MORTH specifications and as directed by the Engineer-In-Charge. (Excluding chamber frame and cover). ( SSR Item No : 2 ) (PMC NON-DSR ) Unique No (23012602) Rate List Year (2025-2026)</p>	7	14854 / Per No	103978



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
ITEM NO : 11 Construction of granular sub-base by providing close graded Material, mixing in a mechanical mix plant at OMC, carriage of mixed Material to work site, spreading in uniform layers with motor grader/ Paver on prepared surface and compacting with vibratory roller to achieve the desired density, complete as per clause 401 -- Plant Mix Method and Grading - I Material ( SSR Item No : 3.01 ) (PMC ROAD ) Item Spec : (MORTH 401) Unique No (116) Rate List Year (2023-2024)	504	2667 / Cubic Metre	1344168
ITEM NO : 12 DENSE BITUMINOUS MACADAM WITH SCADA: Proving and laying dense bituminous macadam using crushed aggregates of Grading I, premixed with bituminous binder of specified grade of Bitumen @ 4.50 per cent by weight of total mix and filler, transported to site with VTS , laid over a previously prepared surface, finished to the required grade, level, alignment, and rolling to achieve the desired density for 76-100 mm compacted thickness .USING Batch mix type hot mix plant with SCADA, Sensor Paver with scada, vibratory roller with scada.with Stone Dust filler.(VG-30 bulk bitumen rates are considered to arrive at rates) ( SSR Item No : 3.44 ) (PMC ROAD ) Item Spec : (MORTH 505) Unique No (159) Rate List Year (2023-2024)	137.84 4	10993 / Cubic Metre	1515319. 09
ITEM NO : 13 BITUMINOUS CONCRETE WITH SCADA:- Providing and laying bituminous concrete using crushed aggregates of grading II, premixed with bituminous binder @ 6% per cent by weight of total mix and filler, transported to site with VTS , laid over a previously prepared surface, finished to the required grade, level, alignment, and rolling to achieve the desired compaction for 50 mm compacted thickness with specified grade of Bitumen,Excluding prime / tack coat. For Bitumen of specified grade -- USING Batch mix type hot mix plant with Sensor Paver with scada, vibratory roller with scada.r with Stone Dust filler. (VG-40 bulk bitumen rates are considered ) ( SSR Item No : 3.51 ) (PMC ROAD ) Unique No (628) Rate List Year (2024-2025)	14.4	13353 / Cubic Metre	192283.2
ITEM NO : 14 मॅनहोल चेंबर रस्त्याच्या समपातळीत वांश्चणे फुटपाथ वरील अथवा पदपथ वरील ड्रेनेज, पाणीपुरवठा इ. कामाचे मॅनहोल चेंबर्स वरील कव्हर्स २०० मीमी उंची पर्यन्त रस्त्याच्या समपातळी येईल असे M २५ ग्रेड चे कॉक्रीट व HYSD स्टील (drawing नुसार वापरून करून परत घट्ट बसवणे त्यामध्ये सदरचा चेंबर समपातळी मध्ये घेणे तसेच चेंबर भोवती सदर कॉक्रीट वापर करून रस्ता पातळी एक करणे सर्व माल- मजुरी लीड क्युअरिंग इत्यादी सह पूर्ण ( SSR Item No : 8.36 ) (PMC ROAD ) Unique No (413) Rate List Year (2023-2024)	27	4253 / Number	114831



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 15 Providing and fixing factory made Hydraulically pressed Mechanically vibrated and compacted precast inter locking cement concrete paving blocks 100MM thick in M-50 grade of approved size and shape for City streets and roads with high volume/ heavy traffic as specified and as per IS 15658:2006 including cost of all materials, manufacturing, curing, transportation of blocks to work site including loading, unloading and stacking as directed, laying paving blocks in position over prepared bed of natural sand / crushed sand of 50 mm thickness including necessary excavation in all stratas, spreading blinding of fine sand over the prepared bed, compacting blocks by plate vibrator etc. complete. ( SSR Item No : 5.21 ) (PMC ROAD ) Item Spec : (IRC-SP-63) Unique No (187) Rate List Year (2023-2024)</p>	15	1232 / Square Metre	18480
<p>ITEM NO : 16 ६० जाडीचा फिश इंटरलॉकिंग ब्लॉक्स पुरविणे व बसविणे १:२ प्रमाणातील चाळलेल्या बादुचे नॉर्ट रंगीत ग्रे पेव्हिंग ब्लॉवर पुरविणे, दवाई केलेल्या मुख्य पृष्ठभागावर ५० मि मि जाडीचा वाळूचा / ग्रीट थर पसरविणे, स्क्रिड व्हायब्रेटरचे दबाए/लेवल करणे, दवाई केलेल्या वाहच्या पृष्ठभागावर पेविंग ब्लॉक्स बसवून दर्जांमध्ये चाळलेली रिती भरणे तसेच कर्बींग लगतच्या पेविंग ब्लॉक्स व कर्बींग या मधील पोकळमध्ये १:१ सिमेंट मॉटर मध्ये दर्जा भरणे, व्हायब्रेटर/कॉम्पॅक्टरच्या साहाय्याने दवाई करणे, पाणी मारणे, सर्व साहित्य मटेरियल लीड लिफ्ट पूर्ण सदर ब्लॉक्सच्या आवश्यकतेनुसार गुणनियंत्रणाच्या चाचण्या घेणे आवश्यक आहे. टिप इंटरलॉकिंग ब्लॉक्स पुरविणे व बसविणे या बाबीला स्टार रेट अथवा भाववाद सूत्र अनुज्ञेय नाही. ( SSR Item No : 1.05 ) (PMC ROAD ) Unique No (199) Rate List Year (2023-2024)</p>	180	894 / Square Metre	160920
<p>ITEM NO : 17 Providing and laying Cast in situ/Ready Mix cement concrete in M15 of trap/ granite/quartzite/gneiss metal for foundation / steps including steel centering, formwork, laying/pumping, compacting, roughening them if special finish is to be provided, finishing uneven and honeycombed surface and curing etc. complete. The Cement Mortar 1:3 plaster is considered for rendering uneven and honeycombed surface, only. Newly laid concrete shall be covered by gunny bag, plastic, tarpaulin etc. with fully automatic micro processor based PLC with SCADA enabled concrete Batch mix plant etc. complete. With fine aggregate (Crushed sand VSI Grade) ( SSR Item No : 24.04 ) (PMC ROAD ) Item Spec : (Bd.E.2 Page One Number 288 and B.7 Page No 38) Unique No (417) Rate List Year (2023-2024)</p>	18	6677 / Cubic Metre	120186



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
ITEM NO : 18 Providing and applying tack coat on the prepared surface cleaning with mechanical broom, and high pressure air jet, heating by fumes in Boiler and spraying bitumen set footed in bitumen boiler self propelled or towed bitumen pressure sprayer on B.T. surface 2.5 kg/10 sqm.(VG-30 bulk bitumen rates are considered to arrive at rates) ( SSR Item No : 3.30 ) (PMC ROAD ) Item Spec : (MORTH 503) Unique No (144) Rate List Year (2023-2024)	1800	19 / Square Metre	34200
ITEM NO : 19 हॉटमिक्स मालाचे पॅचवर्क करणे -(मालाची किंमत वगळून) हॉटमिक्स बिटुमिनस मॅकाडम /एस.डी.बी.सी./अस्फाल्ट,कॉक्रीट माल पेव्हेर फिनिशरने पॅचवर्कसाठी पसरवणे ,खड्या भोवती मार्किंग करणे,खड्याच्या कडा उभ्या खोडणे,लूज माल काढून व सर्व बाजू स्वच्छ करणे ,टॅककोट मारणे ,हॉटमिक्स,बिटुमिनस अथवा अस्फालटिक कॉक्रीटचा माल खड्यात भरणे ,लाईन लेवल करणे,पाँवर रोलर अथवा डायनापॅक ,व्हायब्रेटर रोलर ने दवाई करणे ,मूळ पृष्ठभाग केंबरला जुळवणे इ.सह.पूर्ण (As Directed By Engineering In Charge) खड्यातील बेस क्रोस्सिंग वी.एम ( SSR Item No : 1.15 ) (PMC ROAD ) Unique No (434) Rate List Year (2023-2024)	1800	54 / Square Metre	97200
ITEM NO : 20 पुणे मनपाच्या येरवडा हॉटमिक्स प्लान्ट सेथून नमाच्याहीपर्यंत डांबरी नसनालाची वाहतुक करणे ( SSR Item No : 1.05 ) (PMC ROAD ) Unique No (424) Rate List Year (2023-2024)	500	450 / Metric Tonne	225000
ITEM NO : 21 Machinery Hire Charges : (With Diesel & Operator / Driver) Roller Vibrator ( SSR Item No : 1.23 ) (PMC ROAD ) Unique No (442) Rate List Year (2023-2024)	120	2043 / Hour	245160
ITEM NO : 22 Machinery Hire Charges : (With Diesel & Operator / Driver) JCB ( SSR Item No : 1.20 ) (PMC ROAD ) Unique No (439) Rate List Year (2023-2024)	50	1272 / Hour	63600
ITEM NO : 23 Machinery Hire Charges : (With Diesel & Operator / Driver) Dumper ( SSR Item No : 1.21 ) (PMC ROAD ) Unique No (440) Rate List Year (2023-2024)	300	973 / Hour	291900



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 24 Supplying &amp; fixing composite Resin Manhole cover &amp; frame load bearing capacity (B-125) 12.5 M. Tan (Inspection shall be as per guidelines of EN 124:2004. Required replacement warranty for 24 months if installation is not correct. As directed by Engineer In charge Make approved by EIL/Department Marking Required. ॢ Manufacturing Guidelines EN-124 ॢ Load Bearing capacity B-125 ॢ Name or id Mark of Manufacturer ॢ Year of Manufacturing Circular 53 cms Dia. (21") ( SSR Item No : 1.25 ) (PMC ROAD ) Unique No (219) Rate List Year (2023-2024)</p>	20	4800 / Number	96000
<p>ITEM NO : 25 Supplying &amp; fixing composite Resin Manhole cover &amp; frame load bearing capacity (B-125) 12.5 M. Tan (Inspection shall be as per guidelines of EN 124:2004. Required replacement warranty for 24 months if installation is not correct. As directed by Engineer In charge Make approved by EIL/Department Marking Required. ॢ Manufacturing Guidelines EN-124 ॢ Load Bearing capacity B-125 ॢ Name or id Mark of Manufacturer ॢ Year of Manufacturing 600 mm X 600 mm ( SSR Item No : 1.28 ) (PMC ROAD ) Unique No (222) Rate List Year (2023-2024)</p>	5	6670 / Number	33350
<p>ITEM NO : 26 Supplying &amp; fixing composite Resin Manhole cover &amp; frame load bearing capacity (B-125) 12.5 M. Tan (Inspection shall be as per guidelines of EN 124:2004. Required replacement warranty for 24 months if installation is not correct. As directed by Engineer In charge Make approved by EIL/Department Marking Required. ॢ Manufacturing Guidelines EN-124 ॢ Load Bearing capacity B-125 ॢ Name or id Mark of Manufacturer ॢ Year of Manufacturing 900 mm X 600 mm ( SSR Item No : 1.29 ) (PMC ROAD ) Unique No (223) Rate List Year (2023-2024)</p>	5	7901 / Number	39505
<p>ITEM NO : 27 Supplying &amp; fixing composite Resin Manhole cover &amp; frame load bearing capacity (B-125) 12.5 M. Tan (Inspection shall be as per guidelines of EN 124:2004. Required replacement warranty for 24 months if installation is not correct. As directed by Engineer In charge Make approved by EIL/Department Marking Required. ॢ Manufacturing Guidelines EN-124 ॢ Load Bearing capacity B-125 ॢ Name or id Mark of Manufacturer ॢ Year of Manufacturing 900 mm X 900 mm ( SSR Item No : 1.30 ) (PMC ROAD ) Unique No (224) Rate List Year (2023-2024)</p>	3	13700 / Number	41100



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 28 Supplying &amp; fixing composite Resin Manhole Strom water drain gully gratings cover &amp; frame load bearing capacity (B-125) 12.5 M. Tan (Inspection shall be as per guidelines of EN 124:2004; Required replacement warranty for 24 months if installation is not correct. As directed by Engineer In charge Make approved by EIL/Department Marking Required. 肘 Manufacturing Guidelines EN-124 肘 Load Bearing capacity B-125 肘 Name or id Mark of Manufacturer 肘 Year of Manufacturing 600 mm X 600 mm ( SSR Item No : 1.31 ) (PMC ROAD ) Unique No (225) Rate List Year (2023-2024)</p>	5	6755 / Number	33775
<p>ITEM NO : 29 Providing and constructing on sewer line, B. B. masonry circular manhole with concentric cone 1.2 M dia. at bottom and 0.5 M dia. at top and upto a depth of 1.50 M with 23 cm. thick and 35cm thick brickwork for balanced depth in 230 X 100 X 75 mm brick masonry in CM 1:5 proportion intensity micro-Prismatic Grade Sheeting (HIP) having pressure plastering both inside and outside in CM 1:3 with cement finish, half round RCC pipe of required dia excluding excavation including PCC1:3:6 in bed 100 mm thick , haunches and channels in 1:2:4 proportion concrete, finishing channels in smooth rendering, providing 100 mm thick 1:2:4 coping on the top of the masonry &amp; below frame including providing and fixing approved make and quality S.F.R.C. frame and cover of 56 cm dia. heavy duty 275 kg. etc. complete as directed by Engineer in-charge. Note : The rate of this item is inclusive of hydraulic testing of chamber. Providing and constructing on sewer, B. B. masonry circular manhole with concentric cone (as per attached drawing no.1) ( SSR Item No : 56 ) (PMC Drainage ) Unique No (19206) Rate List Year (2024-2025)</p>	8	30605 / Number	244840
<p>ITEM NO : 30 Providing and fixing informatory sign boards of size 60 cm x 80 cm made out of 14 gauge Aluminum sheet bonded with IRC Specified colour of retro reflective sheeting of Type IV High Intensity Micro-Prismatic Grade Sheeting (HIP) having pressure sensitive / heat activated adhesive, IRC Specified colour retro reflective cutout border &amp; messages having pressure sensitive adhesive having border &amp; messages in IRC Specified colour background including M.S. angle iron post of size 65 mm X 65 mm X 6 mm, 3.65 m long, duly painted with flat oil paint having alternate black and white bands of 25 cm width including G.I. fixtures etc; fixing the boards in 1:4:8 concrete block of size 60cm X 60cm X 75cm including transportation etc; complete. Alluminium sheet Type IV High Intensity Micro-Prismatic Grade Sheeting ( SSR Item No : 6.51 ) (PMC ROAD ) Item Spec : (IRC-67 2012) Unique No (336) Rate List Year (2023-2024)</p>	12	8723 / Number	104676



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
<p>ITEM NO : 31 L type Kerb: Providing &amp; fixing Reinforced precast-L shape kerb stone Using 6 mm steel bars 4 number along the kerb length and 8 mm steel bar 500 mm c/c vertical reinforcement , M-30 grade concrete with dimensions 350 mm high,125 mm thick with built in base of 187 mm x 75 mm, including 2 numbers of 50 mm dia sleeves for services at the top of the base &amp; with top external edge with rounding of 20 mm radius in highly superior quality surface &amp; edge finish in 1 meter length &amp; Painting as per direction of Engineer - in - Charge. ( Including excavation for kerbing, lead lift and transportation of excavated material, P.C.C. below kerbing) ( SSR Item No : 1.01 ) (PMC ROAD ) Unique No (195) Rate List Year (2023-2024)</p>	150	1333 / Number	199950
<p>ITEM NO : 32 Repairing/lifting of circular manhole chamber Demolition of existing circular manhole chamber upto depth as directed by engineer incharge, transportation of demolished material, providing and constructing B.B. masonry in 230 X 100 X 75 mm brick for circular manhole chamber in CM 1:5 proportion, both inside and outside plaster in CM 1:3 with cement finish, 100 mm thick PCC 1:2:4 coping on B.B. masonry, fixing precast S.F.R.C. frame and cover etc. complete as directed by Engineer-in-charge. Note : Wall thickness : 0.23 M for depth of 2.0 M and 0.35 M for balance depth exceeding 2.0 M. Add/rebate for every increase in depth of 50 cm or part thereof for all dia of circular manhole chamber ( SSR Item No : 94.viii ) (PMC Drainage ) Unique No (19341) Rate List Year (2024-2025)</p>	15	4108 / 50 cm depth	61620
<p>ITEM NO : 33 Road Marking with Hot Applied Thermoplastic Compound with Reflectorizing Glass Beads on Bituminous Surface- Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorizing glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35 .The finished surface to be level, uniform and free from streaks and holes.complete. ( SSR Item No : 6.12a ) (PMC ROAD ) Item Spec : (MORTH 803.4) Unique No (251) Rate List Year (2023-2024)</p>	200	508 / Square Metre	101600
<p>ITEM NO : 34 आय.आर.सी १९-१९८८ नुसार गतिरोधक निर्माण करणे. मनपाच्या हॉट मिक्स प्लांट वरील डाबरी मिक्स मटेरीअल २मीx१०सेमी मापाचा आयताकृती मध्यभाग लोखंडी चनल च्या सहायाने भरणे व तदंतर दोन्ही बाजूकडील १.५ मी लांबीचा ऊताराचा भाग (१:२०),आय.आर.सी १९-१९८८ मधील रेखाचित्रानुसार भरून रोलर च्या सहायाने दृढीभूत करणे इ.पूर्ण यामध्ये रहदारी नियंत्रण,वरीकेटींग,सूचना फलक इ. अंतर्भूत ( SSR Item No : 1.27 ) (PMC ROAD ) Unique No (446) Rate List Year (2023-2024)</p>	10	2074 / Running Metre	20740



# पुणे महानगरपालिका, पुणे

Description	Quantity	Rate/Unit	Amount (₹)
Total For Sub Work: Sixty Seven Lakhs Sixty Three Thousand Four Hundred Fifty Nine Rupees			6763459

-----End Of Content-----

Dnyaneshwar Dhondiram Sonwalkar  
कनिष्ठ अभियंता / शाखा अभियंता  
हडपसर - मुंबवा क्षेत्रीय कार्यालय  
पुणे महानगरपालिका

Ganesh Nilkanth Puram  
उप अभियंता  
हडपसर - मुंबवा क्षेत्रीय कार्यालय  
पुणे महानगरपालिका

Ravi Ashokrao Khandare (Prabhari)  
महापालिका सहाय्यक आयुक्त  
हडपसर - मुंबवा क्षेत्रीय कार्यालय  
पुणे महानगरपालिका





# पुणे महानगरपालिका, पुणे

PMC/ZONE-4/HADAPSAR/...EXE-03

2026

## टेंडर गोषवारा

टेंडर क्रमांक:

१. ठेकादाराचे नाव व पत्ता:

२. कामाचे नाव: हडपसर - मांजरी क्षेत्रीय कार्यालयांचे कार्यक्षेत्रात प्रभाग क्र.17 विविध रस्त्यांवर पाणीपुरवठा वाहीनी /मल:निसारण वाहीनी / गॅस वाहीनी / वीज वाहीनी तसेच केबल खोदाईचे रिईन्स्टेटमेंट करणे तसेच इतर तद्. कामे करणे.

३. टेंडर / कोटेशन बाबींची पुर्वगणित रक्कम रुपये: **Rs.6763459/-**

४. ठेकेदाराने रोख भरावयाची बयाना रक्कम (अंदाजे 1% टक्के) रक्कम रुपये **Rs. 67635/-** (Online / NEFT / RTGS)

५. अ) यशस्वी ठेकेदाराने अनामत रक्कम (अंदाजे 4 टक्के) रक्कम रुपये **Rs. 270538/-** प्रथम बिलामधून कपात करण्यात येईल .

ब) ज्या कामाची रनिंग बिले तीन पेक्षा जास्त होणार नाहीत, त्यांची राहिलेली ४ टक्के अनामत रक्कम प्रथम बिलामधून वसूल करण्यात येईल.

क) चार पेक्षा जास्त बिले होणार असल्यास ५०% टक्के काम होईपर्यंत प्रत्येक रनिंग बिलामधून १ टक्के अनामत रक्कम कापून घेण्यात येईल व अंतिम बिलापुर्वीच्या बिलातील जाहीर टेंडर रक्कमेच्या ४ टक्का अनामत रक्कम कापण्यात येईल.

६. काम पूर्ण करण्या साठी मुदत **12** महिने

७. डिफेक्ट लायबिलिटी पिरियड **24** महिने हा कालावधी पूर्ण होईपर्यंत संपूर्ण अनामत रक्कम रोखून धरली जाईल.

८. काम मुदतीत न झाल्यास करण्यात येणाऱ्या कमाल दंडाबाबतच्या अटी सोबत जोडल्या आहेत.

९. कामासाठी ठेकेदारास म.न.पा. ने पाणीपुरवठा केल्यास आकरण्यात येईल दर :

अ) मीटरने पुरविल्यास प्रचलित दर 0

ब) मीटरखेरीज कनेक्शन दिल्यास दरमहा रु **300/-**

अथवा प्रत्येक सिमेंट पोत्यास रक्कम रु ४ /-

प्रमाणे (१०० पोत्यांपेक्षा कमी वापर असल्यास) जो दर कमी येईल तो घेणे

१०. ठेकेदाराने टेंडर / कोटेशन गोषवारा (फॉर्म, समरी शीट) व मेमोरेंडमवर स्वाक्षरी करणे आवश्यक आहे

११. टेंडर विक्रीचा दिनांक ते दिनांक पर्यंत दुपारी वाजेपर्यंत

राहिल व टेंडर स्वीकारण्याचा दिनांक रोजी दुपारी वाजेपर्यंत राहिल.

१२. ठेकेदाराने मेमोरान्डम मधील दिलेल्या युनिट प्रमाणे दर देणे आवश्यक आहे.त्यात बदल करता कामा नये. टेंडर दिल्यानंतर



# पुणे महानगरपालिका, पुणे

त्यात कोणताही बदल केला जाणार नाही व दिलेल्या दरानेच टेंडरची रक्कम काढली जाईल. युनिट बदलून दर दिल्यास त्या (टेंडरचा) विचार केल जाणार नाही.

१३. टेंडर स्वीकृतीसाठी टेंडरमधील दर ठेकेदारास 12 महिने मुदती पर्यंत बंधन कारक राहिल.

## Terms and Conditions:

Dnyaneshwar Dhondiram Sonwalkar  
कनिष्ठ अभियंता / शाखा अभियंता  
कार्यालय(हडपसर- मांजरी)  
पुणे महानगरपालिका

Ganesh Nilkanth Puram  
उप अभियंता  
कार्यालय(हडपसर- मांजरी)  
पुणे महानगरपालिका

Ravi Ashokrao Khandare (Prabhari)  
महापालिका सहाय्यक आयुक्त  
कार्यालय(हडपसर- मांजरी)  
पुणे महानगरपालिका



राज्य निवडणूक आयोग  
महाराष्ट्र

प्रभाग क्र : १७

रामटेकडी-माळवाडी-वैदुवाडी

प्रभाग लोकसंख्या	
एकूण	१२८४२
अ.जा.	१९०७०
अ.ज.	११९०


Key Map



*Donker*

Legend

- Ward 2025
- MC\_Boundary
- Road
- National Highway
- Railway Line
- River

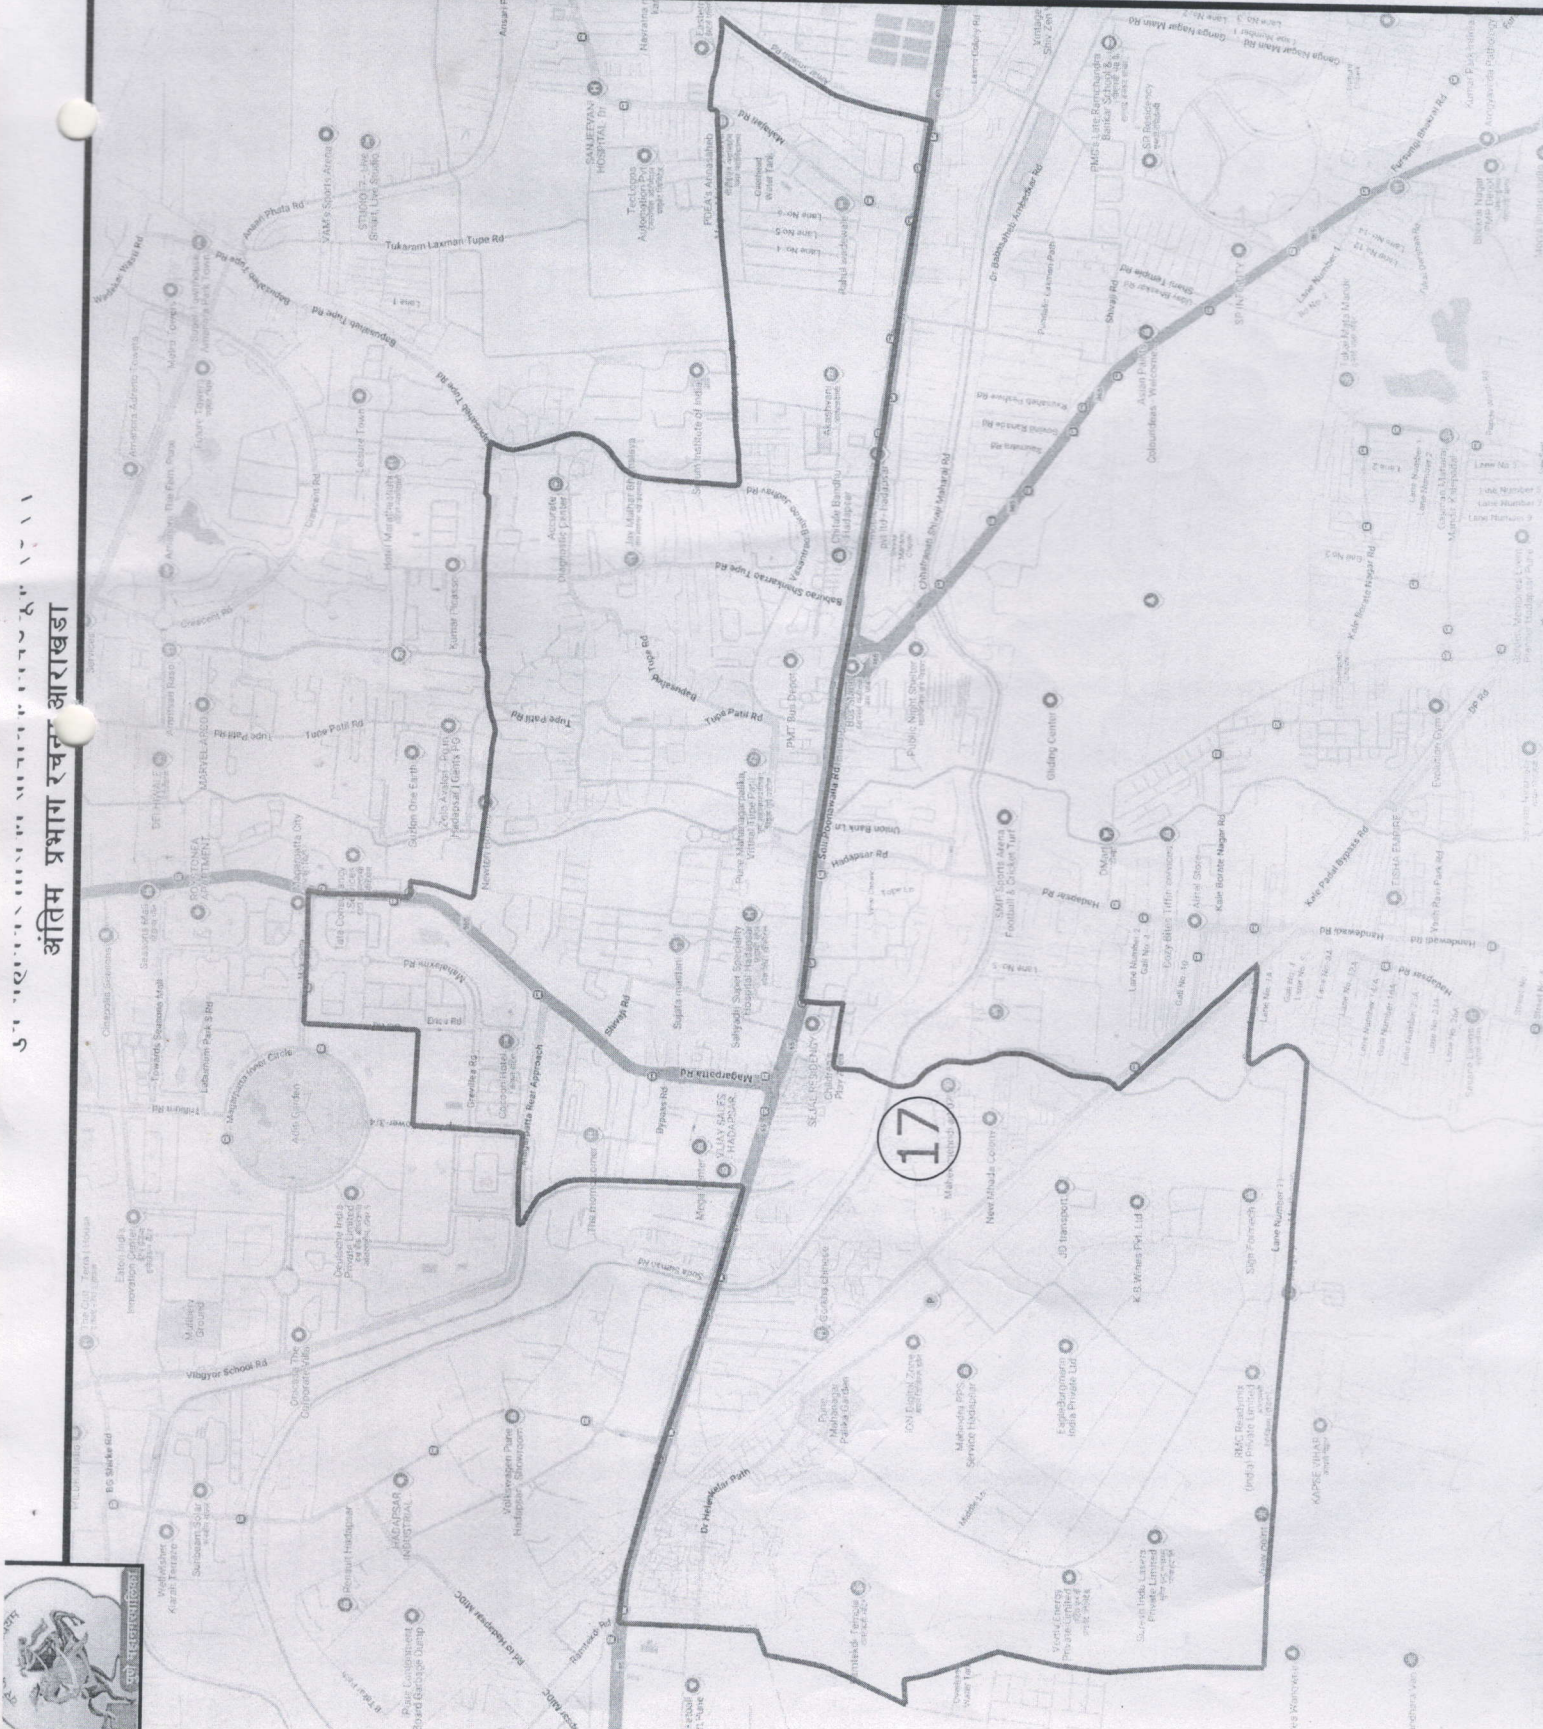

Validate

Print

Help

**Percentage BoQ**

Tender Inviting Authority: JMC-DMC-4

Name of Work: हडपसर - मांजरी क्षेत्रीय कार्यालयांचे कार्यक्षेत्रात प्रभाग क्र. १७ विविध रस्त्यांवर पाणीपुरवठा वाहीनी / मलनिसारण वाहीनी / गॅस वाहीनी / बीज वाहीनी तसेच केवळ खोदाईचे रीस्ट्रेटमेंट करणे तसेच इतर तद्-कामे करणे

Contact No: श्री. ज्ञानेश्वर सोनवलकर 9665919571

Name of the Bidder/ Bidding Firm /		PRICE SCHEDULE (This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only )									
NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	NUMBER #	NUMBER #	NUMBER #	NUMBER #	NUMBER #	NUMBER #
Sl. No.	Item Description	Quantity	Units	Estimated Rate in Rs. P	TOTAL AMOUNT Without Taxes in Rs. P	TOTAL AMOUNT With Taxes	TOTAL AMOUNT In Words	TEXT #	TOTAL AMOUNT	TEXT #	TOTAL AMOUNT
1	हडपसर - मांजरी क्षेत्रीय कार्यालयांचे कार्यक्षेत्रात प्रभाग क्र. १७ विविध रस्त्यांवर पाणीपुरवठा वाहीनी / मलनिसारण वाहीनी / गॅस वाहीनी / बीज वाहीनी तसेच केवळ खोदाईचे रीस्ट्रेटमेंट करणे तसेच इतर तद्-कामे करणे	4	5	6	53	54	55				
1	GSB	151.000	CUBIC METER	2,667.00	402717.00	402717.00	INR Four Lakh Two Thousand Seven Hundred & Seventeen Only				
2	DBM	41.000	CUBIC METER	10,993.00	450713.00						
3	60 MM INTER LOCKING BLOCK	54.000	SQUARE METER	894.00	48276.00						
<b>Total in Figures</b>					<b>402717.00</b>	<b>402717.00</b>	<b>INR Four Lakh Two Thousand Seven Hundred &amp; Seventeen Only</b>				
<b>Quoted Rate in Figures</b>			Select		<b>0.00</b>	<b>0.00</b>	<b>INR Zero Only</b>				
<b>Quoted Rate in Words</b>					<b>INR Zero Only</b>						

PVC/ZONE-4/HADAPSAR/2026/EX-3





का. १७ विविध रस्त्यांवर  
हडपसर-मांजरी क्षेत्रीय कार्यालय

पथ विभागाकडील रिईनस्टेटमेंटच्या कामासाठी विशेष निविदा अटी व शर्ती

१. सदर कामासाठी ठेकेदाराकडे स्वतःची अथवा भाडेतत्वावर वाहने असणे बंधनकारक आहे. त्याबाबतची कागदपत्रे निविदेसोबतच जोडणे बंधनकारक राहिल.
२. निविदा भरल्यानंतर निविदा छाननीत पात्र निविदाधारकांची बीड कॅप्सिटी व फायनान्सियल कॅप्सिटी मर्यादा संपल्यानंतर पुढील निविदा L2 / L3 दराचे निविदा धारकाची पात्रता तपासून निवेदमधील L1 दरापेक्षा कमी दराने L2 / L3 निविदाधारकास रितसर काम देण्यात येईल.
३. सदर कामाच्या ठेकेदार यांनी प्रत्येक महिन्याच्या शेवटी प्रत्यक्ष काम करताना होणारा बदल बचतवाढ तक्त्यात अंतर्भूत करून संबंधित कार्यकारी अभियंता यांना सादर करावा व त्यानुसार संभाव्य बचतवाढ तक्ता मान्य करून घ्यावा. अंतिम बचतवाढ तक्त्यात मान्य मर्यादेपेक्षा जादा बाबींचा विचार करण्यात येणार नाही.
४. सदर कामाची देयके दर तीन महिन्यांनी ठेकेदार यांनी संबंधित कार्यकारी अभियंता यांना सादर करावीत व अशा प्रकारे बिल सादर न केल्यास सदर बिलाची जबाबदारी खात्याची राहणार नाही. बिल तरतुदीअभावी अदा न झाल्यास त्याची सर्वस्वी जबाबदारी ठेकेदाराची राहिल.
५. निविदा संचाल अन्वयत्र काहीही समकक्ष सूचना आढळून आल्यास, वरील अटीशर्तीच अंतीम राहतील.
६. मा. शहर अभियंता यांनी कार्यालयीन परिपत्रक क्र.पथ/६६४७ दि. ११/११/२०२२ नुसारच दुरुस्तीची कामे करण्यात यावीत.
७. खड्डे दुरुस्तीसाठी खड्डा चौकोनी / आयताकार करणेकामी जनरेटवर चालणा-या कटर/ब्रेकरची व्यवस्था असणे आवश्यक आहे.

पुणे महानगरपालिका  
मा. अति. महानगरपालिका आयुक्त (ज./वि./इ)  
दस्तावेज क्र. २/१००६  
दिनांक २९/०२/२०२४



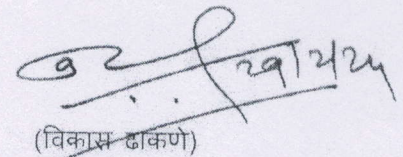  
(विकास ढाकणो)

अति.महापालिका आयुक्त (वि)

पुणे महानगरपालिका

ABP  
29/2/2024