
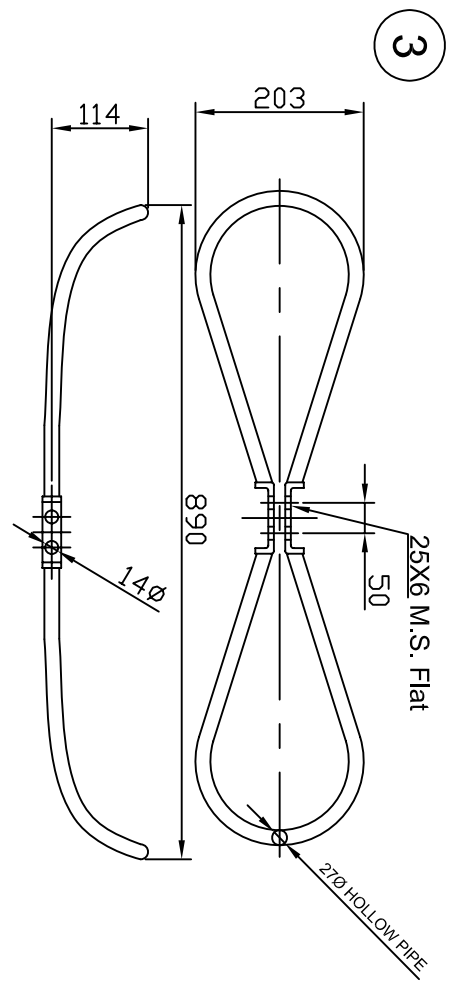
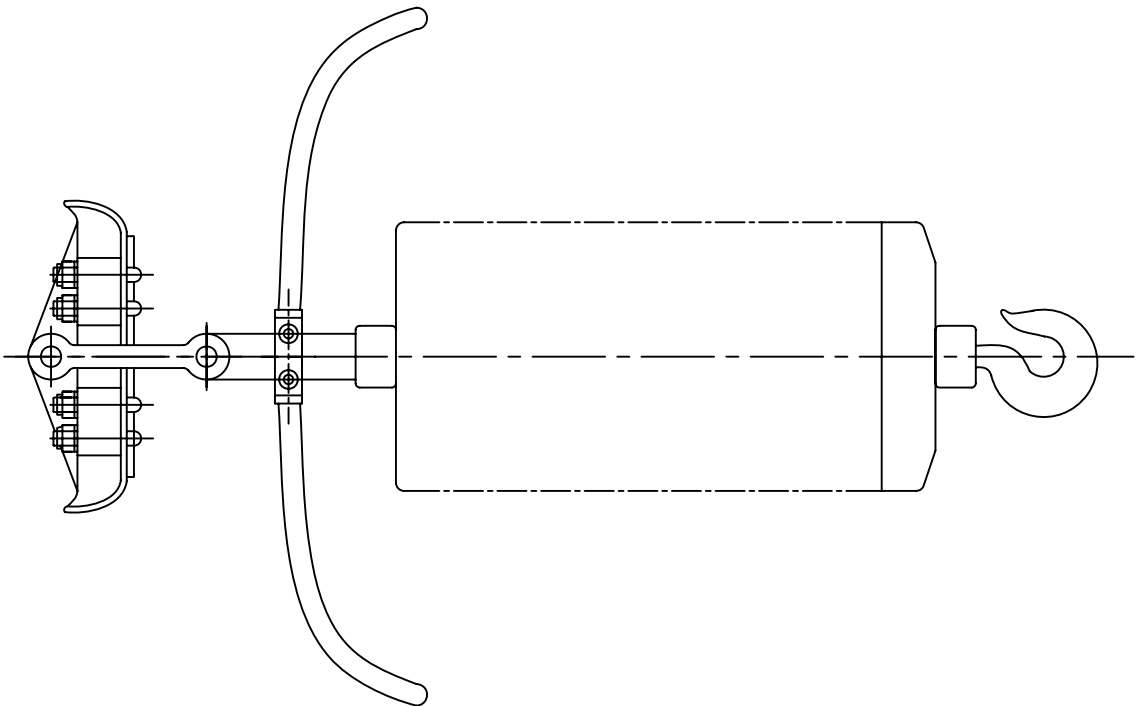
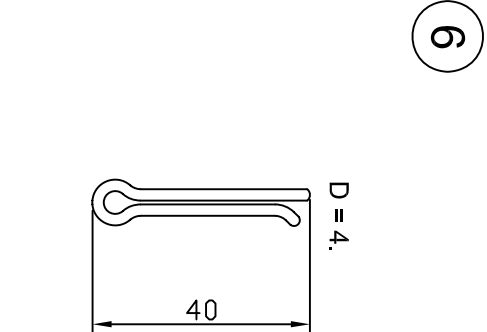
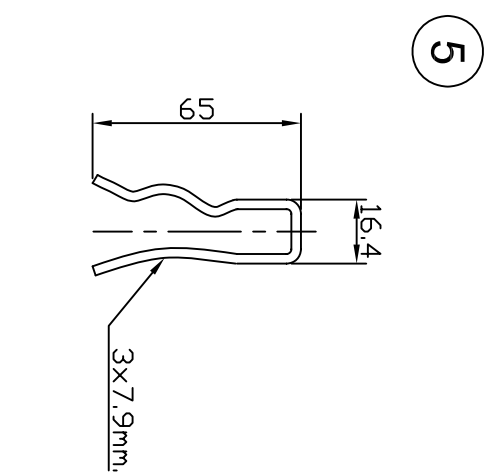
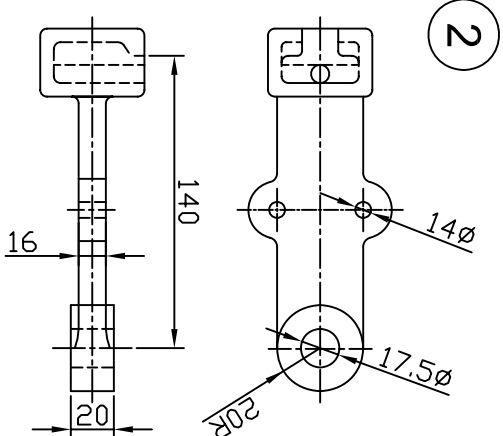
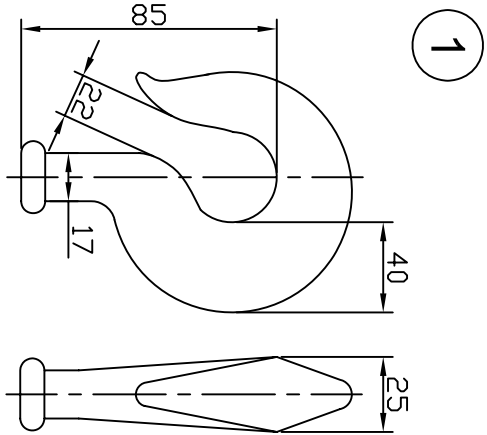
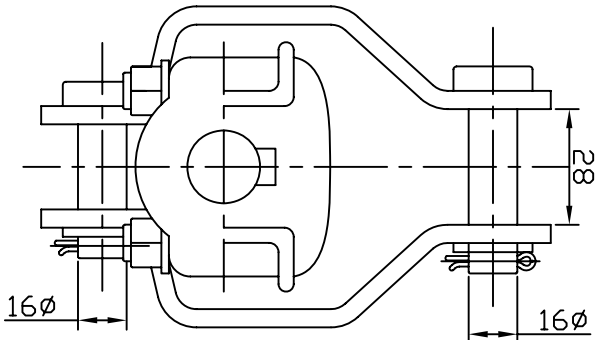


NOTES:-			
1 - ALL DIMENSIONS ARE IN MM.			
2 - GENERAL TOLERANCEN AS PER IS 2486			
3 - MECH. FAILING LOAD = 50% OF UTS OF ZEBRA CONDUCTOR.			
5 - SLIP STRENGTH = 15% UTS OF ACSR ZEBRA CONDUCTOR.			
S.R. NO.	DESCRIPTION	QTY.	SPECIFICATION
6	SPLIT PIN.	2	BRASS / S.S.
5	R - CLIP.	1	ST. STEEL. / P. B.
4	SUSPENSION CLAMP	1	ALUMINIUM & STEEL.
3	ARCING HORN.	1	M. S. HDG.
2	SOCKET EYE.	1	FORGED STEEL. HDG.
1	BALL LINK.	1	FORGED STEEL. HDG.

SINGLE SUSPENSION STRING

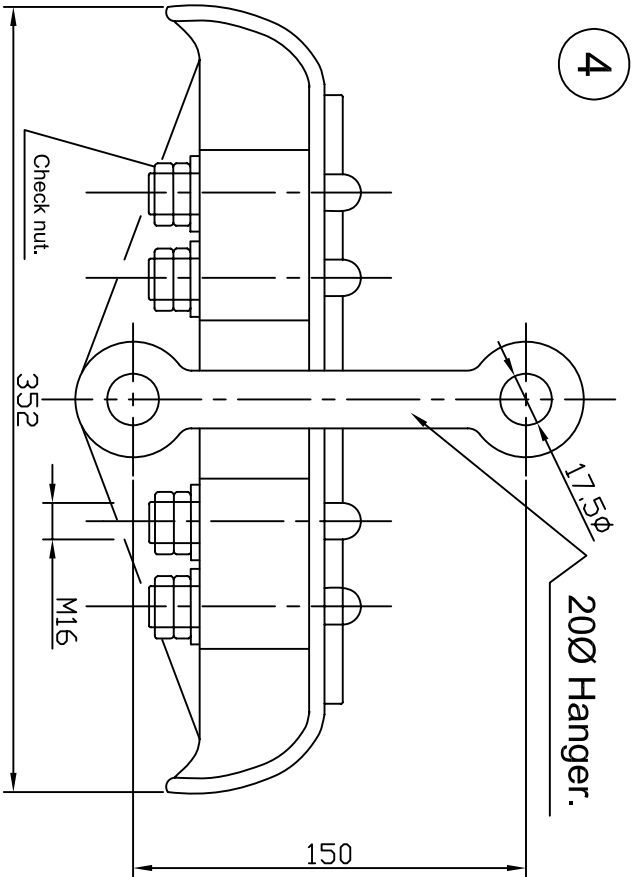

SUSPENSION CLAMP.

DRAWN:		CHECKED:		APPD:		SHEET:	
SCALE:		DATE:		DRG. NO:		SHEET:	
DESCRIPTION:		REV:		2L-STD / HW-031 / 003		1 OF 1	
REV:		DESCRIPTION:		REV:		R0	

GUJARAT ENERGY TRANSMISSION CORPN.LTD.	
S.P.VIDYUT BHAVAN, RACE COURSE,	
VADODARA - 390 007	

220KV SINGLE SUSPENSION HARDWARE