


TUBULAR REPAIR SLEEVE

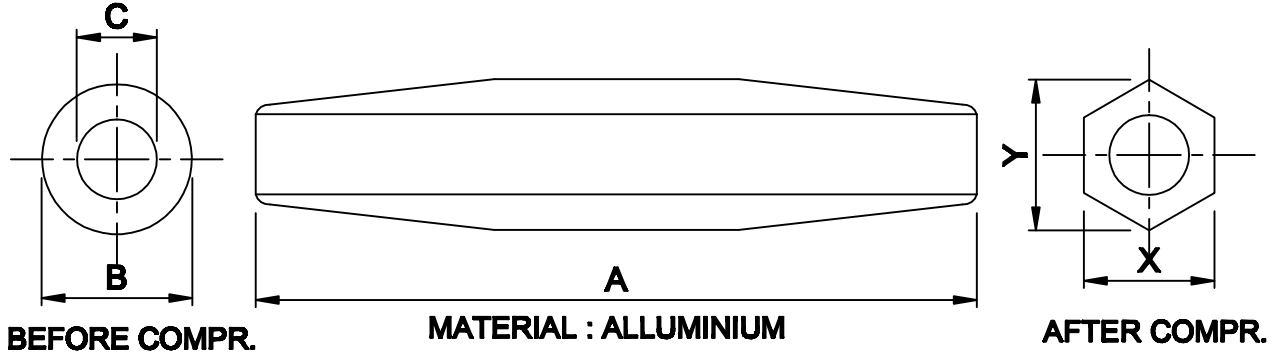

NO.	CONDUCTOR	BEFORE COMPRESSION			AFTER COMPRESSION		CONDUCTOR DIA.
		A	B	C	X	Y	
1	DOG	203	30	16.7	25	29.4	14.15
2	PANTHER	241	38	23	32	37	21
3	ZEBRA	279	48	31	40	46	28.67
4	MOOSE	305	54	34	46	53	33.77

NOTE:-

1. TOLERANCES IN DIMENSION SHALL AS PER IS.
2. SLIP STRENGTH 95% OF UTS OF CONDUCTOR
3. MATERIAL SHALL HAVE IDENTIFYING EMBOSSED PROPERLY.
4. ALL DIMENSION ARE IN MM

		TENDER PURPOSE			
		 GUJARAT ENERGY TRANSMISSION CORPN.LTD. S.P.VIDYUT BHAVAN, RACE COURSE, VADODARA - 390 007			
		<u>Tubular Repair Sleeve Suitable for ACSR Conductor</u>			
		DRAWN:	CHECKED:	APPD:	
					SIZE: A4
		SCALE:	DATE:	DRG. NO: GETCO / E / 2/108L-STD / CAC-031/004	SHEET: 1 OF 1
REV:	DESCRIPTION:				REV: R0